


◆ 编带尺寸 / CARRIER TAPE DIMENSIONS

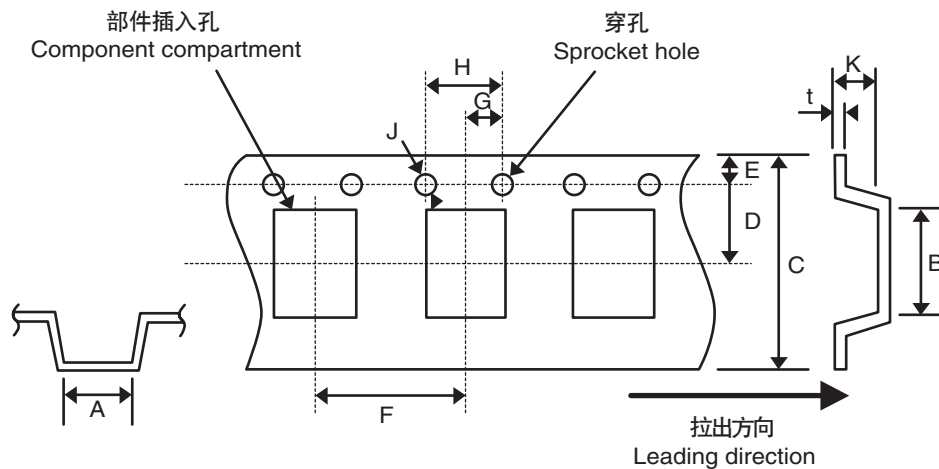

(mm)

| | A ±0.1 | B ±0.2 | C ±0.3 | D ±0.05 | E ±0.1 | F ±0.1 | G ±0.05 | H ±0.1 | J 0/+0.1 | K ±0.2 | t ±0.05 |
|-------------|-----------|-----------|-----------|------------|-----------|-----------|------------|-----------|-------------|-----------|------------|
| SLE/SZE | 4.50 | 7.70 | 12.0 | 5.5 | 1.75 | 8.0 | 2.0 | 4.0 | φ1.5 | 1.6 | 0.3 |
| SXB/SXE/SWZ | | | | | | | | | | 2.3 | |
| SW(2.7mm) | | | | | | | | | | 2.9 | |
| SW(2.9mm) | | | | | | | | | | 3.1 | |

◆ 部件插入孔A和B的尺寸作为内侧底部的尺寸。

Dimension A and B are the measure of compartment's inside bottom.


◆ 产品的阳极位于拉出方向的右侧。

The (+) polarity of the chip is placed on right side towards the unreeling direction.

◆ 上盖胶带尺寸 (胶带厚度 : 75 ± 25μm、胶带宽度 : 9.5 ± 0.2mm)

Dimension of top cover tape (Thickness of cover tape : 75 ± 25μm, Width of cover tape : 9.5 ± 0.2mm)

◆ 卷筒尺寸 / REEL DIMENSIONS

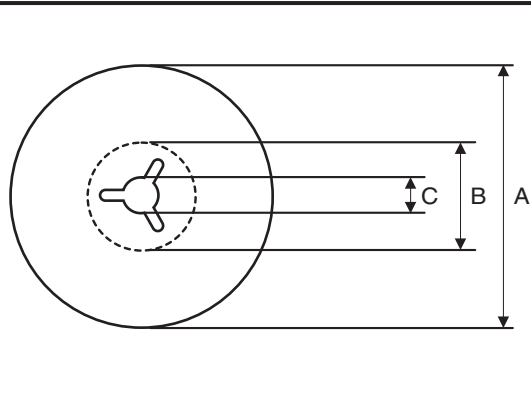

Packing quantity

| Series | Pieces/Reel |
|-------------|-------------|
| SLE/SZE | 3500 |
| SXB/SXE/SWZ | 3500 |
| SW | 2000 |

(mm)

| A | B | C | W1 | W2 |
|-------------|------------|------------|------------|------------|
| φ 330 ± 2.0 | φ 80 ± 1.0 | φ 13 ± 0.2 | 13.4 ± 1.0 | 17.4 ± 1.0 |

◆ 标识 / MARKING

<D外形/D case>

阳极 Anode

额定静电容量(μF)
Rated Capacitance(μF)

Lot No.

额定电压记号
Rated Voltage

额定电压记号 / Rated voltage mark

| 记号 Mark | 额定电压 Rated voltage |
|---------|--------------------|
| d | 2 V.DC |
| e | 2.5 V.DC |
| g | 4 V.DC |
| j | 6.3 V.DC |
| k | 8 V.DC |
| A | 10 V.DC |

◆ 产品型号体系 / PART NUMBER

| | | | |
|------------------------------|-----------------------|------------------------------------|---------------------------------------|
| □□□ 额定电压 Rated Voltage | □□□ 系列名称 Series | □□□ 额定静电容量 Rated Capacitance | M 静电容量容许差 Capacitance Tolerance |
| ↓ | ↓ | ↓ | ↓ |


| 记号 Code | 额定电压 Rated Voltage |
|---------|--------------------|
| 2 | 2 V.DC |
| 2.5 | 2.5 V.DC |
| 4 | 4 V.DC |
| 6 | 6.3 V.DC |
| 8 | 8 V.DC |
| 10 | 10 V.DC |

| 记号 Code | 系列名称 Series |
|---------|-------------|
| SLE | SLE series |
| SXB | SXB series |
| SXE | SXE series |
| SW | SW series |
| SZE | SZE series |
| SWZ | SWZ series |

| 记号 Code | 静电容量 Capacitance |
|---------|------------------|
| 22 | 22 μF |
| 33 | 33 μF |
| 47 | 47 μF |
| 68 | 68 μF |
| 82 | 82 μF |
| 100 | 100 μF |
| 120 | 120 μF |
| 150 | 150 μF |
| 180 | 180 μF |
| 220 | 220 μF |
| 270 | 270 μF |
| 330 | 330 μF |
| 390 | 390 μF |
| 470 | 470 μF |

| 记号 Code | 容许差 Tolerance |
|---------|---------------|
| M | ± 20% |

◆尺寸图 / DIMENSIONS

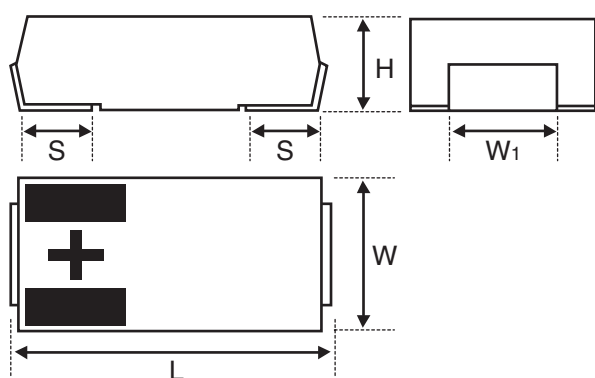


(mm)

| 系列名称 Series | 记号 Size Code | L (± 0.2) | W (± 0.2) | H (± 0.2) | S (± 0.2) | W1 (± 0.1) |
|----------------|-----------------|--------------------|--------------------|--------------------|--------------------|---------------------|
| SLE/SZE | D1 | 7.3 | 4.3 | 1.4 | 1.2 | 2.4 |
| SXB/SXE/SWZ | D2 | 7.3 | 4.3 | 1.9 | 1.2 | 2.4 |
| SW | D3L | 7.3 | 4.3 | 2.7 | 1.2 | 2.4 |
| SW | D3 | 7.3 | 4.3 | 2.9 | 1.2 | 2.4 |

※SLE/SZE H (± 0.1)


◆推荐焊盘尺寸 / RECOMMENDED LAND PATTERN DIMENSIONS

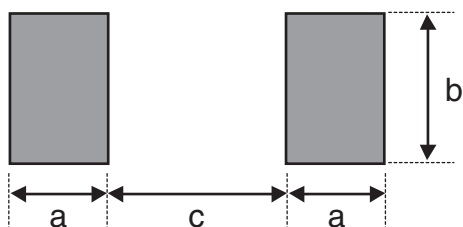

(mm)

| 系列名称 Series | a | b | c |
|----------------|-----|-----|-----|
| SLE/SZE | 2.4 | 2.9 | 3.7 |
| SXB/SXE/SWZ | | | |
| SW | | | |

◆推荐回流焊接条件 / RECOMMENDED REFLOW SOLDERING CONDITION

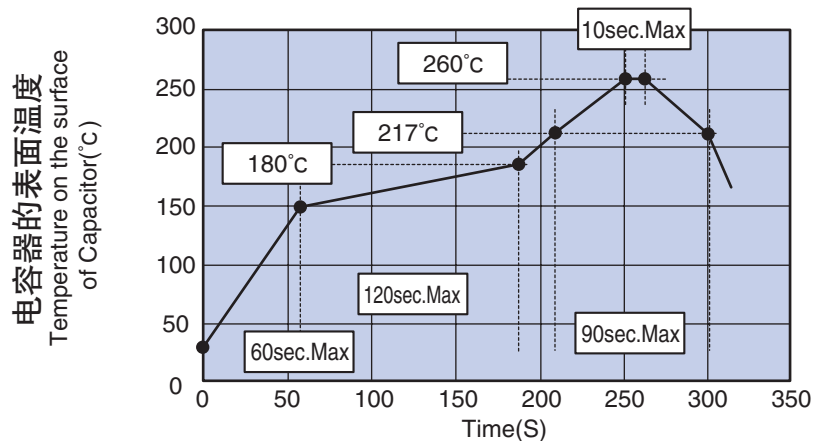

※回流焊接次数
在左边的回流焊接条件下,
最多可进行2次
Please do not perform reflow
soldering more than 2 times.