

HGX SERIES
UPGRADE
Load Life: 125°C 3000 hours, 135°C 3000 hours

- Miniaturized, High Capacitance, High Ripple Current, Low ESR, High Reliability.
- Suitable for DC Link of low voltage inverter.
- AEC-Q200.

RoHS compliance


◆SPECIFICATIONS

Items	Characteristics																		
Category Temperature Range	-40~+135°C (150°C)																		
Rated Voltage Range	25~70Vdc																		
Capacitance Tolerance	±20% (20°C, 120Hz)																		
Leakage Current(MAX)	I=0.03CV or 4µA whichever is greater.(After 1 minute) I=Leakage Current(µA) C=Capacitance(µF) V=Rated Voltage(Vdc)																		
Dissipation Factor(MAX) (tanδ)	<table border="1"> <tr> <td>Rated Voltage (Vdc)</td> <td>25</td> <td>35</td> <td>50</td> <td>70</td> <td>(20°C, 120Hz)</td> </tr> <tr> <td>tanδ</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.10</td> <td></td> </tr> </table> <p>When capacitance is over 1000µF, tanδ shall be added 0.02 to the listed value with increase of every 1000µF.</p>	Rated Voltage (Vdc)	25	35	50	70	(20°C, 120Hz)	tanδ	0.14	0.12	0.10	0.10							
Rated Voltage (Vdc)	25	35	50	70	(20°C, 120Hz)														
tanδ	0.14	0.12	0.10	0.10															
Endurance	<p>After applying rated voltage with rated ripple current for 3000 hours (≥50Vdc:2000 hours) at each temperature, the capacitors shall meet the following requirements.</p> <table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±30% of the initial value.</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 300% of the specified value.</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> </table>	Capacitance Change	Within ±30% of the initial value.	Dissipation Factor	Not more than 300% of the specified value.	Leakage Current	Not more than the specified value.												
Capacitance Change	Within ±30% of the initial value.																		
Dissipation Factor	Not more than 300% of the specified value.																		
Leakage Current	Not more than the specified value.																		
Over temperature proof	<p>After applying rated voltage for 500 hours at 150°C, the capacitors shall meet the following requirements.</p> <table border="1"> <tr> <td>Capacitance Change</td> <td>Within ±30% of the initial value.</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 300% of the specified value.</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> </table>	Capacitance Change	Within ±30% of the initial value.	Dissipation Factor	Not more than 300% of the specified value.	Leakage Current	Not more than the specified value.												
Capacitance Change	Within ±30% of the initial value.																		
Dissipation Factor	Not more than 300% of the specified value.																		
Leakage Current	Not more than the specified value.																		
Low Temperature Stability Impedance Ratio(MAX)	<table border="1"> <tr> <td>Rated Voltage (Vdc)</td> <td>25</td> <td>35</td> <td>50</td> <td>70</td> <td>(120Hz)</td> </tr> <tr> <td>Z(-25°C)/Z(20°C)</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td></td> </tr> <tr> <td>Z(-40°C)/Z(20°C)</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td></td> </tr> </table>	Rated Voltage (Vdc)	25	35	50	70	(120Hz)	Z(-25°C)/Z(20°C)	2	2	2	2		Z(-40°C)/Z(20°C)	3	3	3	3	
Rated Voltage (Vdc)	25	35	50	70	(120Hz)														
Z(-25°C)/Z(20°C)	2	2	2	2															
Z(-40°C)/Z(20°C)	3	3	3	3															

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency (Hz)	120	1k	10k	100k≤
Coefficient	0.45	0.80	1.00	1.00

◆OPTION


Standard item is blank.

◆PART NUMBER

□□□	HGX	□□□□□	M	□□□	□□	DXL
Rated Voltage	Series	Capacitance	Capacitance Tolerance	Option	Lead Forming	Case Size

◆DIMENSIONS

(mm)

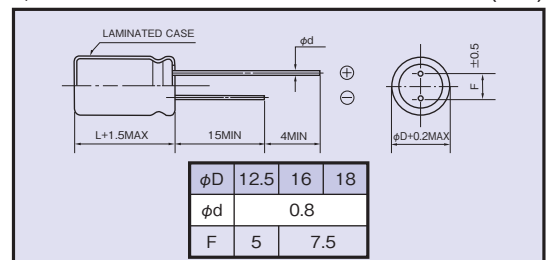

◆STANDARD SIZE

Rated Voltage (Vdc)	Capacitance (μF)	Size φD×L (mm)	Rated ripple current I _o (mA r.m.s./100kHz)		ESR (Ωmax/100kHz)	MAX ripple current I _{MAX} (mA r.m.s./100kHz)		
			135°C	125°C		20°C	135°C	125°C
			25	910	12.5×20	2060	2870	0.046
1100	12.5×23	2390		3340	0.038	2620	3390	4550
1300	12.5×25	2610		3640	0.034	2860	3700	4960
1600	12.5×20	2060		2870	0.046	2260	2920	3910
1600	12.5×30	3030		4230	0.029	3330	4300	5770
1600	16×20	2320		3240	0.034	2550	3300	4420
2000	16×23	2690		3760	0.028	2960	3820	5120
2000	18×20	2490		3470	0.033	2730	3520	4730
2200	12.5×23	2390		3340	0.038	2620	3390	4550
2200	16×25	2930		4090	0.025	3210	4150	5570
2400	12.5×25	2610		3640	0.034	2860	3700	4960
2400	18×23	2880		4010	0.027	3160	4080	5470
2700	16×30	3280		4580	0.021	3610	4660	6250
2700	18×25	3120		4360	0.025	3430	4430	5940
3000	12.5×30	3030		4230	0.029	3330	4300	5770
3000	16×20	2320		3240	0.034	2550	3300	4420
3600	18×30	3460		4840	0.021	3800	4910	6590
3900	16×23	2690		3760	0.028	2960	3820	5120
3900	18×20	2490		3470	0.033	2730	3520	4730
4300	16×25	2930		4090	0.025	3210	4150	5570
4700	18×23	2880	4010	0.027	3160	4080	5470	
5600	16×30	3280	4580	0.021	3610	4660	6250	
5600	18×25	3120	4360	0.025	3430	4430	5940	
6800	18×30	3460	4840	0.021	3800	4910	6590	
35	750	12.5×20	2060	2870	0.046	2260	2920	3910
	910	12.5×23	2390	3340	0.038	2620	3390	4550
	1000	12.5×25	2610	3640	0.034	2860	3700	4960
	1200	12.5×20	2060	2870	0.046	2260	2920	3910
	1300	12.5×30	3030	4230	0.029	3330	4300	5770
	1300	16×20	2320	3240	0.034	2550	3300	4420
	1500	12.5×23	2390	3340	0.038	2620	3390	4550
	1600	12.5×25	2610	3640	0.034	2860	3700	4960
	1600	16×23	2690	3760	0.028	2960	3820	5120
	1600	18×20	2490	3470	0.033	2730	3520	4730
	1800	16×25	2930	4090	0.025	3210	4150	5570
	2000	16×20	2320	3240	0.034	2550	3300	4420
	2000	18×23	2880	4010	0.027	3160	4080	5470
	2200	12.5×30	3030	4230	0.029	3330	4300	5770
	2400	16×30	3280	4580	0.021	3610	4660	6250
	2400	18×25	3120	4360	0.025	3430	4430	5940
	2700	16×23	2690	3760	0.028	2960	3820	5120
	2700	18×20	2490	3470	0.033	2730	3520	4730
	3000	16×25	2930	4090	0.025	3210	4150	5570
	3000	18×30	3460	4840	0.021	3800	4910	6590
3300	18×23	2880	4010	0.027	3160	4080	5470	
3600	16×30	3280	4580	0.021	3610	4660	6250	
3600	18×25	3120	4360	0.025	3430	4430	5940	
4700	18×30	3460	4840	0.021	3800	4910	6590	

Rated Voltage (Vdc)	Capacitance (μF)	Size φD×L (mm)	Rated ripple current I _o (mA r.m.s./100kHz)		ESR (Ωmax/100kHz)	MAX ripple current I _{MAX} (mA r.m.s./100kHz)		
			135°C	125°C		20°C	135°C	125°C
			50	510	12.5×20	1530	2280	0.072
620	12.5×20	1490		2220	0.076	1800	2330	3130
620	12.5×23	1780		2660	0.058	2160	2790	3750
680	12.5×25	1950		2900	0.052	2360	3050	4090
750	12.5×23	1730		2590	0.062	2100	2710	3640
910	12.5×25	1890		2820	0.055	2290	2960	3980
910	12.5×30	2320		3460	0.042	2810	3630	4880
910	16×20	1890		2820	0.049	2290	2960	3980
1100	12.5×30	2250		3370	0.044	2730	3530	4740
1100	16×20	1860		2780	0.051	2260	2920	3910
1100	16×23	2200		3280	0.040	2660	3440	4620
1100	18×20	2060		3070	0.047	2490	3220	4320
1300	16×23	2160		3230	0.041	2620	3390	4540
1300	16×25	2390		3570	0.036	2900	3750	5030
1300	18×20	2040		3050	0.047	2470	3200	4290
1300	18×23	2390		3560	0.038	2900	3740	5020
1600	16×25	2350		3510	0.037	2860	3690	4950
1600	16×30	2840		4240	0.029	3440	4450	5970
1600	18×23	2370		3540	0.039	2870	3710	4980
1600	18×25	2600		3880	0.034	3150	4070	5470
2000	16×30	2790	4170	0.030	3390	4370	5870	
2000	18×25	2580	3850	0.034	3130	4040	5420	
2000	18×30	3080	4600	0.027	3740	4830	6480	
2400	18×30	3050	4560	0.028	3700	4780	6420	
70	240	12.5×20	1340	2000	0.093	1630	2100	2820
	330	12.5×23	1560	2340	0.076	1900	2450	3290
	360	12.5×20	1300	1940	0.099	1580	2040	2740
	360	12.5×25	1710	2550	0.067	2070	2680	3600
	430	12.5×23	1520	2260	0.080	1840	2380	3190
	430	16×20	1690	2530	0.062	2050	2650	3560
	470	12.5×30	2040	3040	0.054	2470	3190	4290
	510	12.5×25	1660	2470	0.072	2010	2600	3490
	560	16×23	1970	2940	0.050	2390	3080	4140
	560	18×20	1860	2780	0.057	2260	2920	3920
	620	12.5×30	1980	2950	0.057	2400	3100	4150
	620	16×20	1660	2480	0.064	2010	2600	3490
	620	16×25	2150	3200	0.045	2600	3360	4510
	680	18×23	2160	3230	0.047	2620	3390	4540
	750	16×23	1930	2880	0.052	2340	3020	4060
	750	18×20	1840	2750	0.058	2230	2880	3870
	820	16×30	2550	3800	0.036	3090	3990	5360
	820	18×25	2350	3510	0.042	2860	3690	4950
	910	16×25	2100	3140	0.047	2550	3300	4420
	1000	18×23	2140	3190	0.048	2590	3350	4490
1000	18×30	2790	4170	0.033	3390	4380	5870	
1100	16×30	2500	3730	0.038	3030	3910	5250	
1100	18×25	2330	3470	0.042	2820	3650	4890	
1300	18×30	2760	4120	0.034	3350	4330	5810	

Rated ripple current I_o :
Ripple current continuous operation within endurance lifetime.

Maximum ripple current I_{MAX} :
Maximum ripple current continuous operation.
Estimated lifetime complies with our lifetime calculation formula.

