

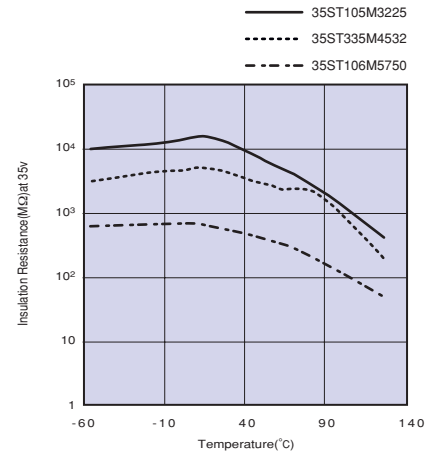
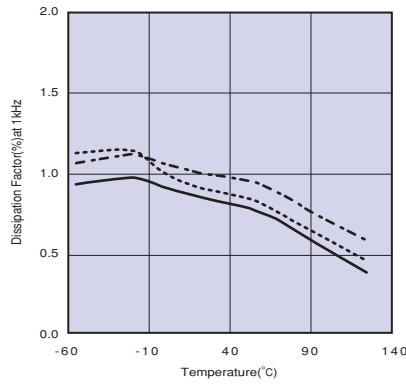
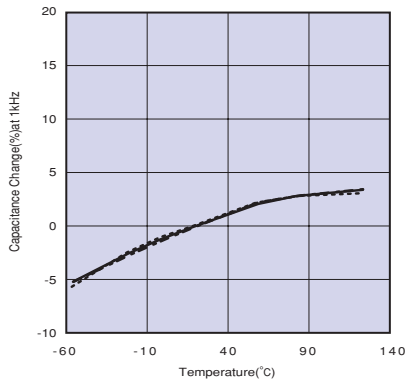
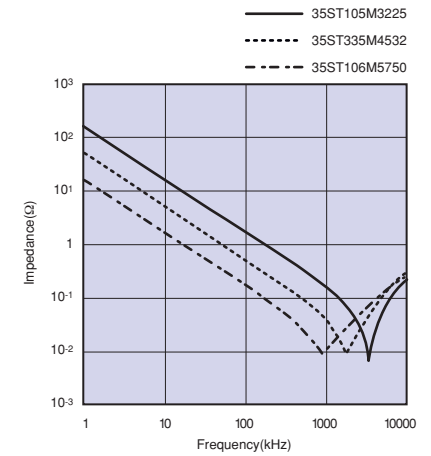


◆ CHARACTERISTICS




◆ TEMPERATURE CHARACTERISTICS

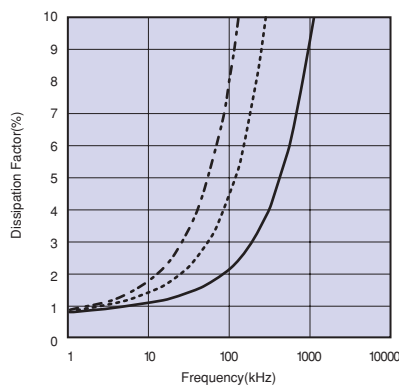




◆ FREQUENCY CHARACTERISTICS

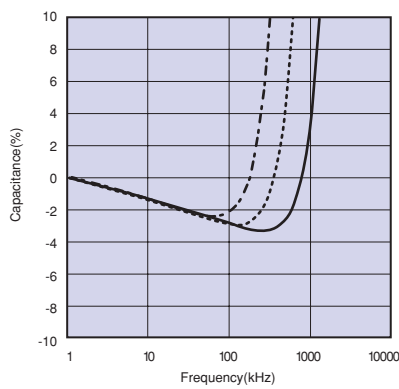


◆ HIGH TEMPERATURE LOADING (125°C, 125% of rated voltage)

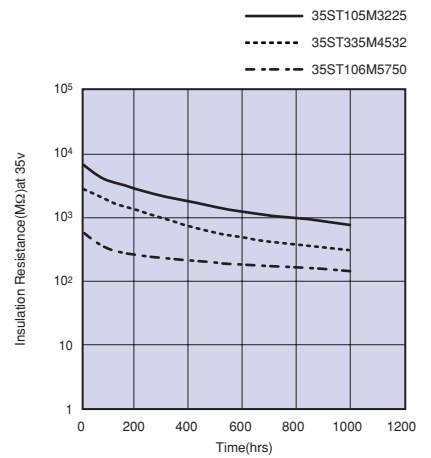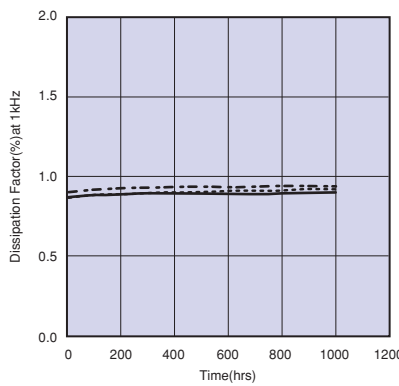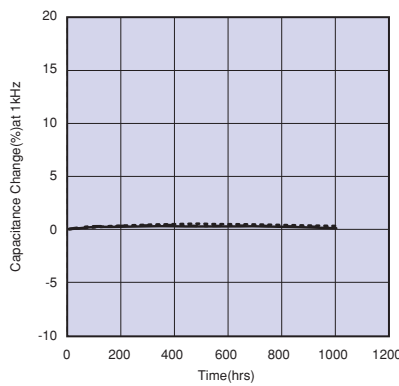

◆ MOISTURE RESISTANCE LOADING (40°C 95%RH, Rated voltage)

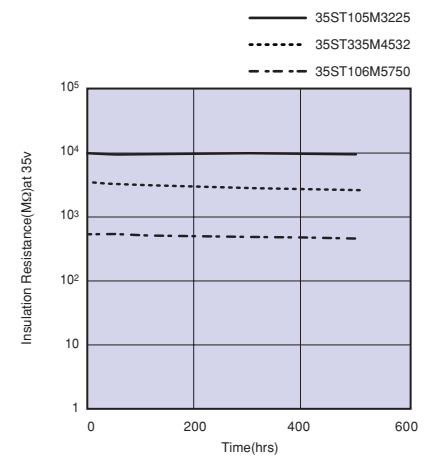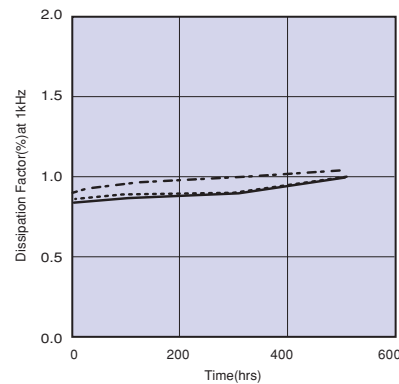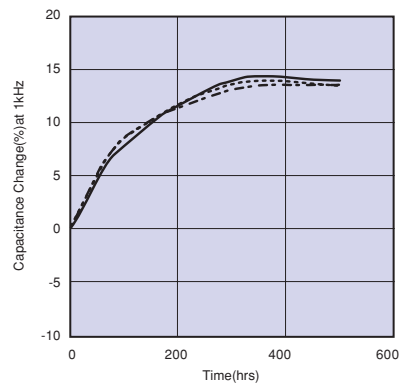

◆ PERMISSIBLE CURRENT

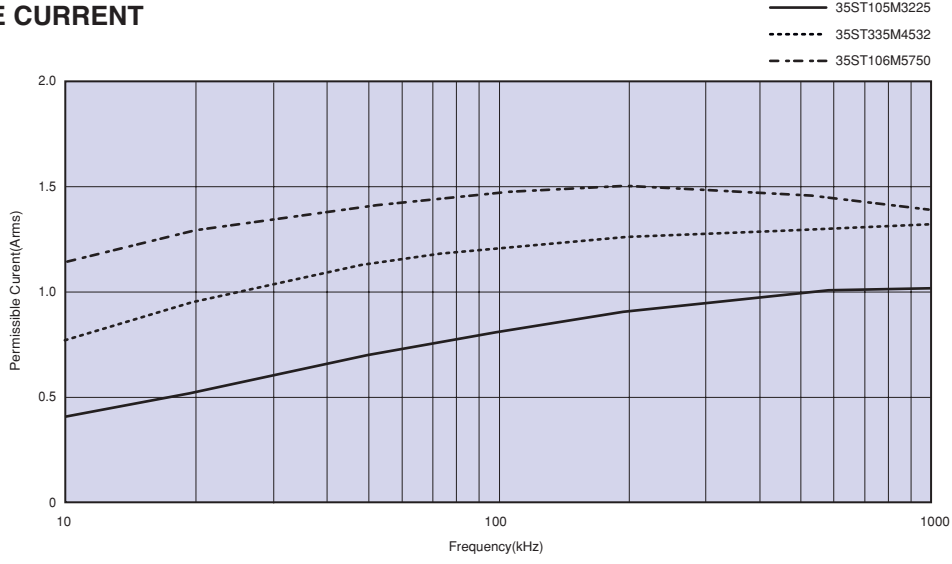

◆ BUZZ · HARMONIC DISTORTION

