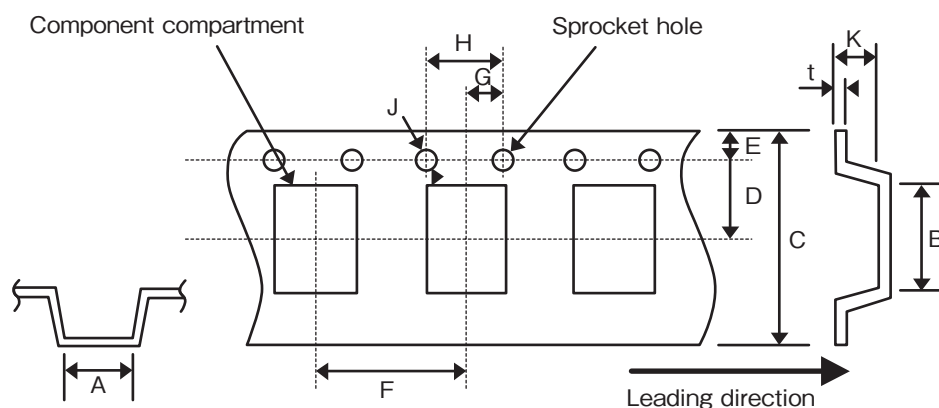
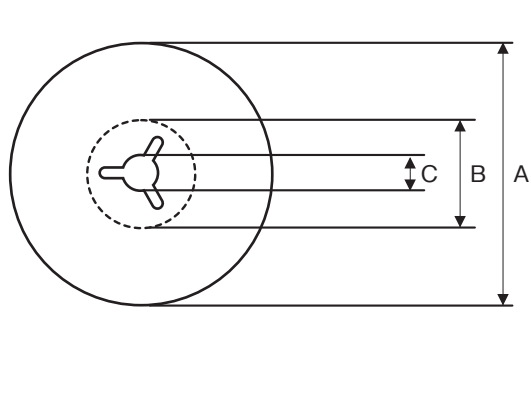


◆ CARRIER TAPE DIMENSIONS


(mm)

	A ±0.1	B ±0.2	C ±0.3	D ±0.05	E ±0.1	F ±0.1	G ±0.05	H ±0.1	J 0/+0.1	K ±0.2	t ±0.05
SLE/SZE	4.50	7.70	12.0	5.5	1.75	8.0	2.0	4.0	φ1.5	1.6	0.3
SXB/SXE/SWZ										2.3	
SW(2.7)										2.9	
SW(2.9)										3.1	

- ◆ Dimension A and B are the measure of compartment's inside bottom.
- ◆ The (+) polarity of the chip is placed on right side towards the unreeling direction.
- ◆ Dimension of top cover tape (Thickness of cover tape: $75 \pm 25 \mu\text{m}$, Width of cover tape: 9.5 ± 0.2)

◆ REEL DIMENSIONS


Packing quantity

Series	Pieces/Reel
SLE/SZE	3500
SXB/SXE/SWZ	3500
SW	2000

(mm)

A	B	C	W1	W2
φ330±2.0	φ80±1.0	φ13±0.2	13.4±1.0	17.4±1.0

◆ MARKING

<D case>

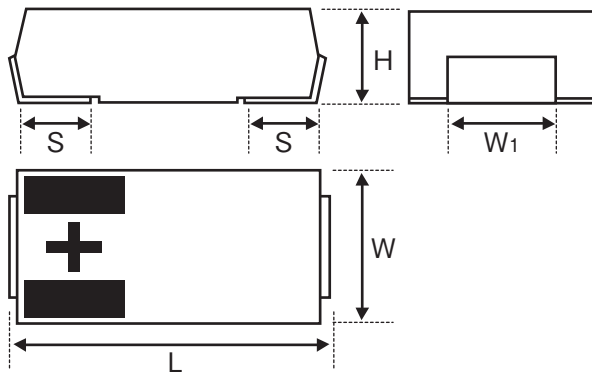
Rated voltage mark

Mark	Rated voltage
d	2 V.DC
e	2.5 V.DC
g	4 V.DC
j	6.3 V.DC
k	8 V.DC
A	10 V.DC

◆ PART NUMBER

□□□ Rated Voltage	□□□ Series	□□□ Rated Capacitance	□ Capacitance Tolerance
↓	↓	↓	↓

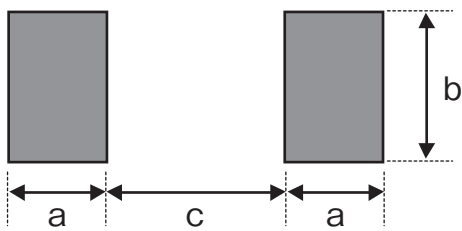
Code	Rated Voltage	Code	Series	Code	Capacitance	Code	Tolerance
2	2 V.DC	SLE	SLE series	22	22 μ F	M	$\pm 20\%$
2.5	2.5 V.DC	SXB	SXB series	33	33 μ F		
4	4 V.DC	SXE	SXE series	47	47 μ F		
6	6.3 V.DC	SW	SW series	68	68 μ F		
8	8 V.DC	SZE	SZE series	82	82 μ F		
10	10 V.DC	SWZ	SWZ series	100	100 μ F		
				120	120 μ F		
				150	150 μ F		
				180	180 μ F		
				220	220 μ F		
				270	270 μ F		
				330	330 μ F		
				390	390 μ F		
				470	470 μ F		

◆ DIMENSIONS


(mm)

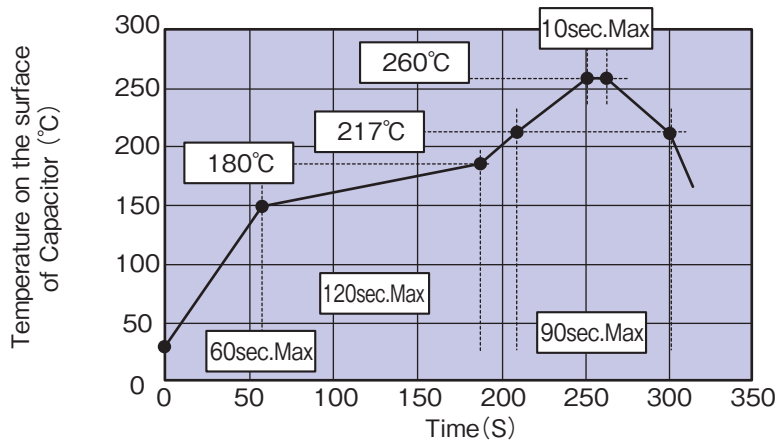
Series	Size Code	L (±0.2)	W (±0.2)	H (±0.2)	S (±0.2)	W1 (±0.1)
SLE/SZE	D1	7.3	4.3	1.4	1.2	2.4
SXB/SXE/SWZ	D2	7.3	4.3	1.9	1.2	2.4
SW	D3L	7.3	4.3	2.7	1.2	2.4
SW	D3	7.3	4.3	2.9	1.2	2.4

※ SLE/SZE H(±0.1)

◆ RECOMMENDED LAND PATTERN DIMENSIONS


(mm)

Series	a	b	c
SLE/SZE	2.4	2.9	3.7
SXB/SXE/SWZ			
SW			

◆ RECOMMENDED REFLOW SOLDERING CONDITION


※ Please do not perform reflow soldering more than 2 times.