



RELIABILITY TEST DATA




TEST ITEM : 1) Load Life Test
 2) Shelf Life Test
 3) CHARACTERISTICS VS. TEMPERATURE

PRODUCTS : 16 JXF 1500 M EFC 10X20
 35 JXF 1000 M EFC 12.5X20
 63 JXF 1500 M EFC 18X30

THE TEST RESULT

RUBYCON CORPORATION




PROJECT: Load Life Test	
SAMPLE: 16 JXF 1500 M EFC 10X20	SIZE: Dia. 10 × 20 L
TESTING METHODS: The capacitor under test shall be applied the rated voltage continuously at 105°C.	APPARATUS: YHP MODEL 4274A LCR METER (at 120Hz)
NOTE: n = 10	

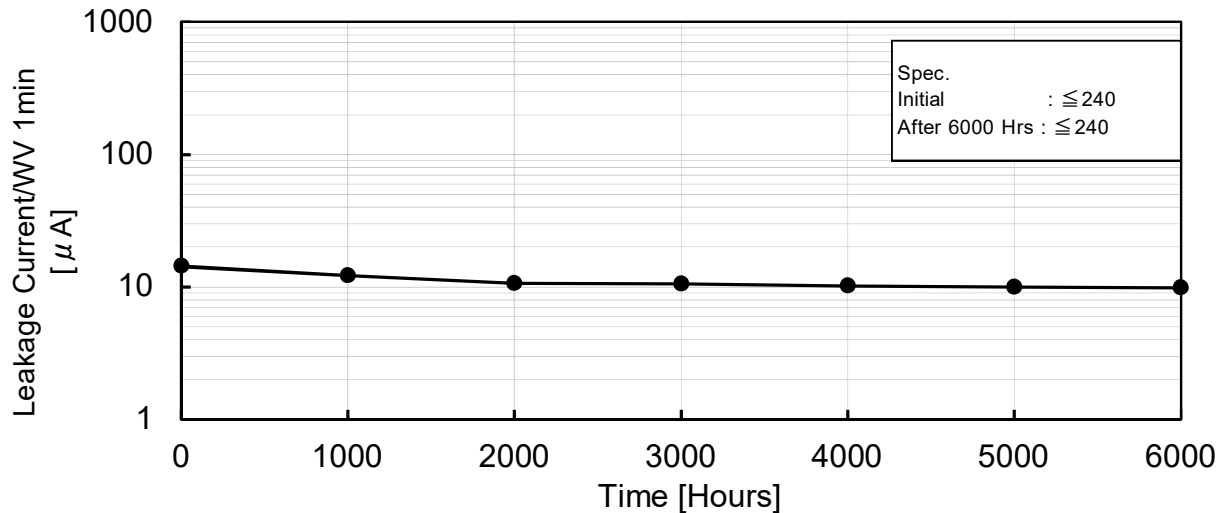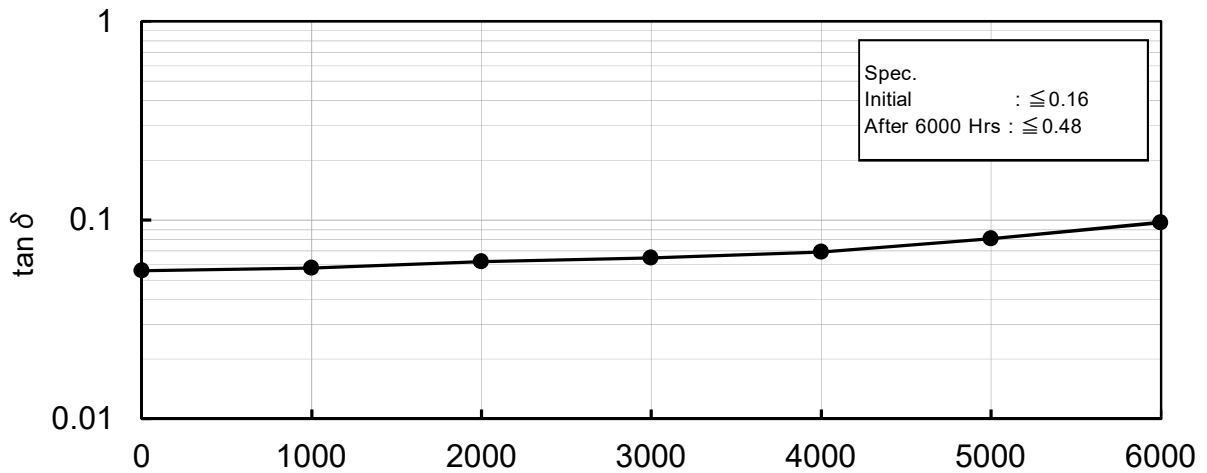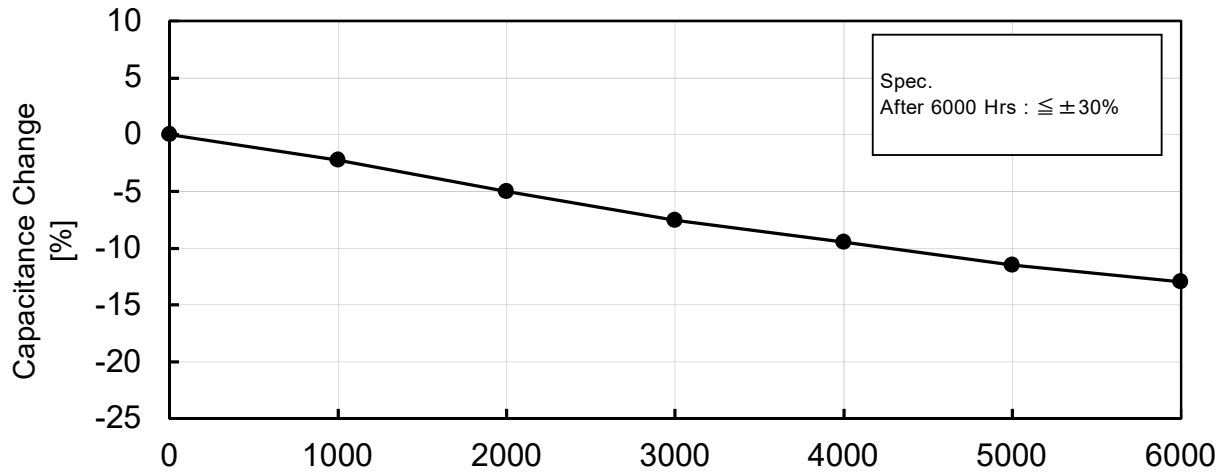

THE TEST RESULT

RUBYCON CORPORATION

PROJECT: Shelf Life Test	
SAMPLE: 16 JXF 1500 M EFC 10X20	SIZE: Dia. 10 × 20 L
TESTING METHODS: Capacitors shall be stored at 105 ±2°C without loading for 1000 Hrs.	APPARATUS: YHP MODEL 4274A LCR METER (at 120Hz)
NOTE: n = 10	

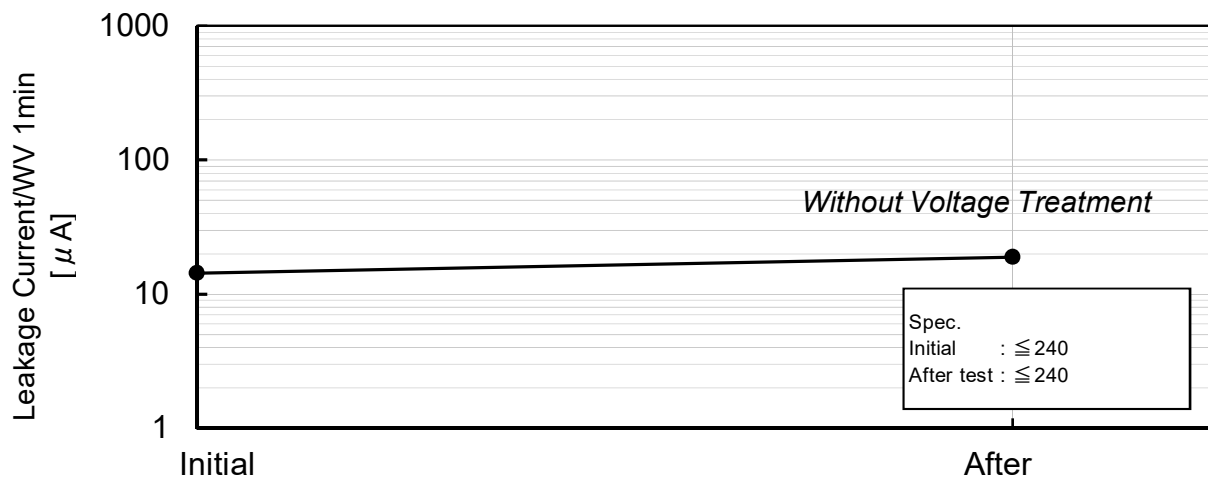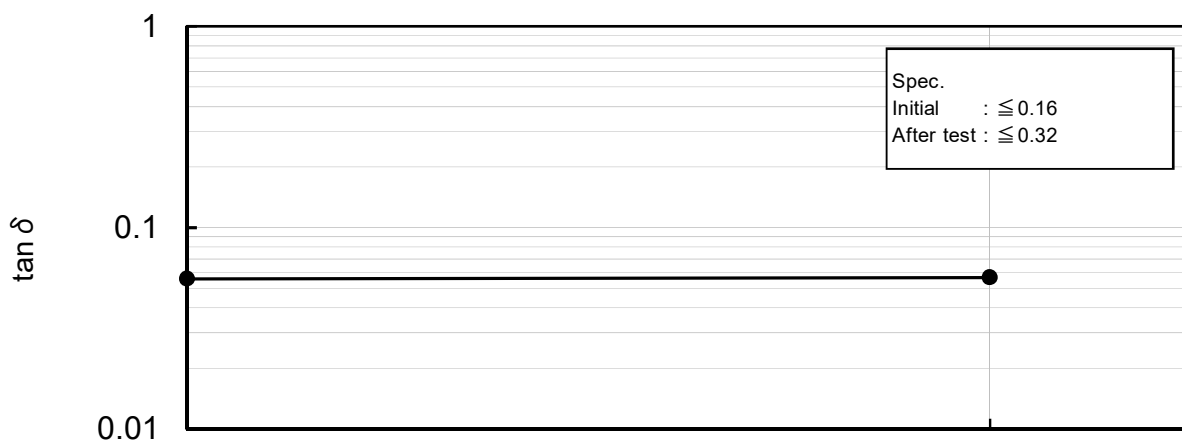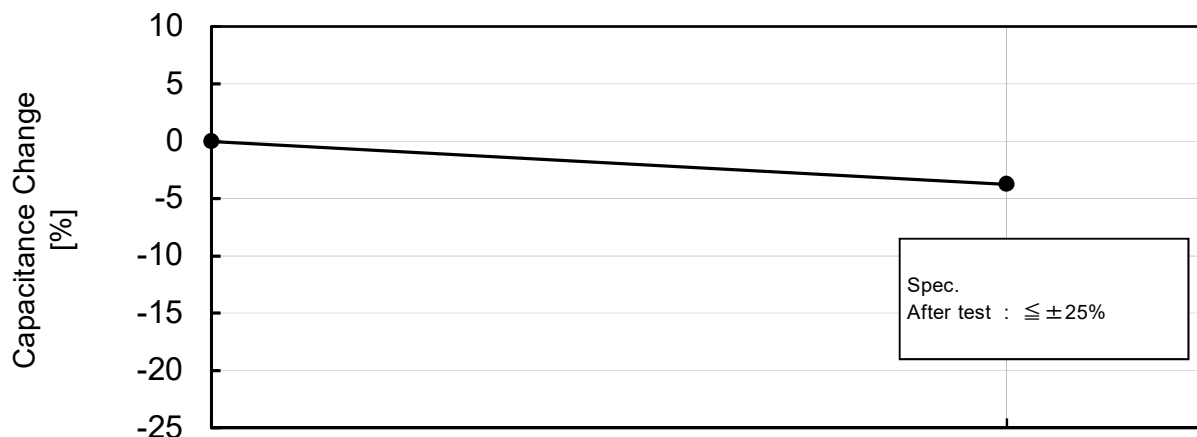

CHARACTERISTICS VS. TEMPERATURE



RUBYCON CORPORATION

SAMPLE :

16 JXF 1500 M EFC 10X20

n=3




Apparatus :
Agilent Technologies - E4980A

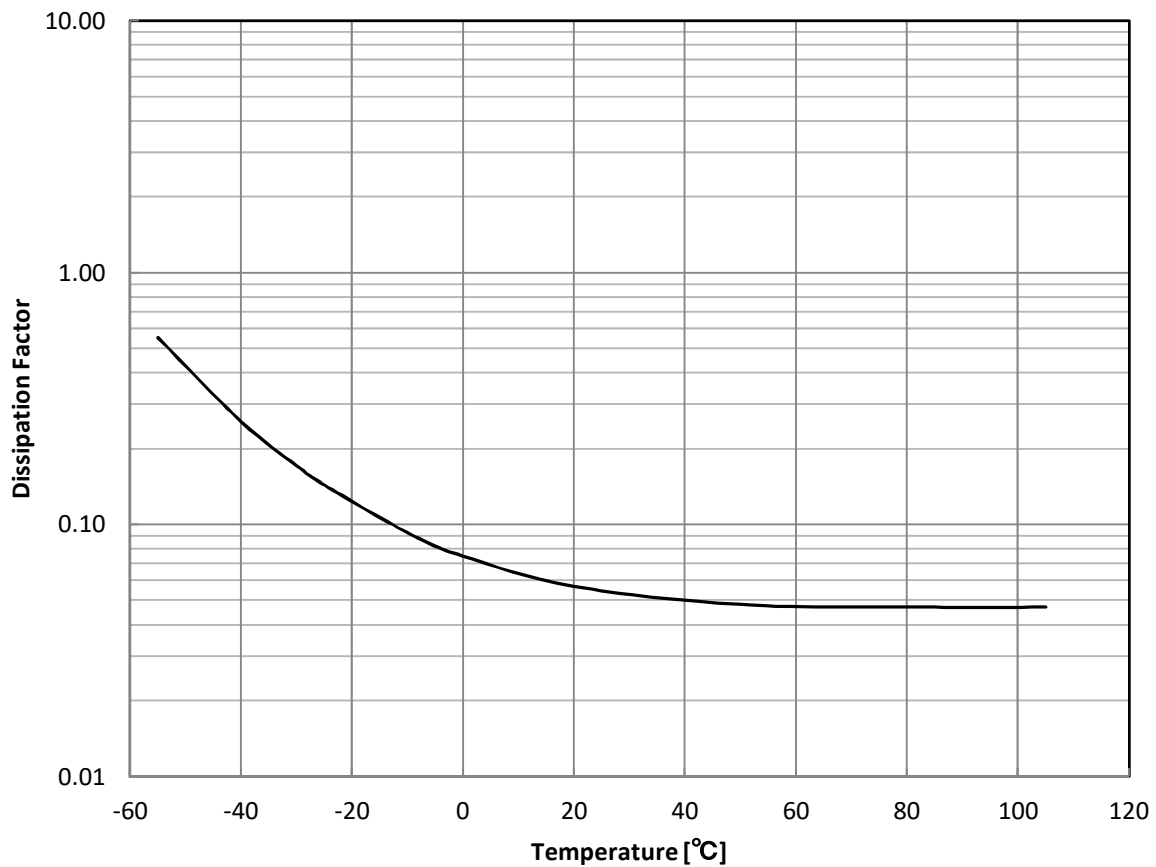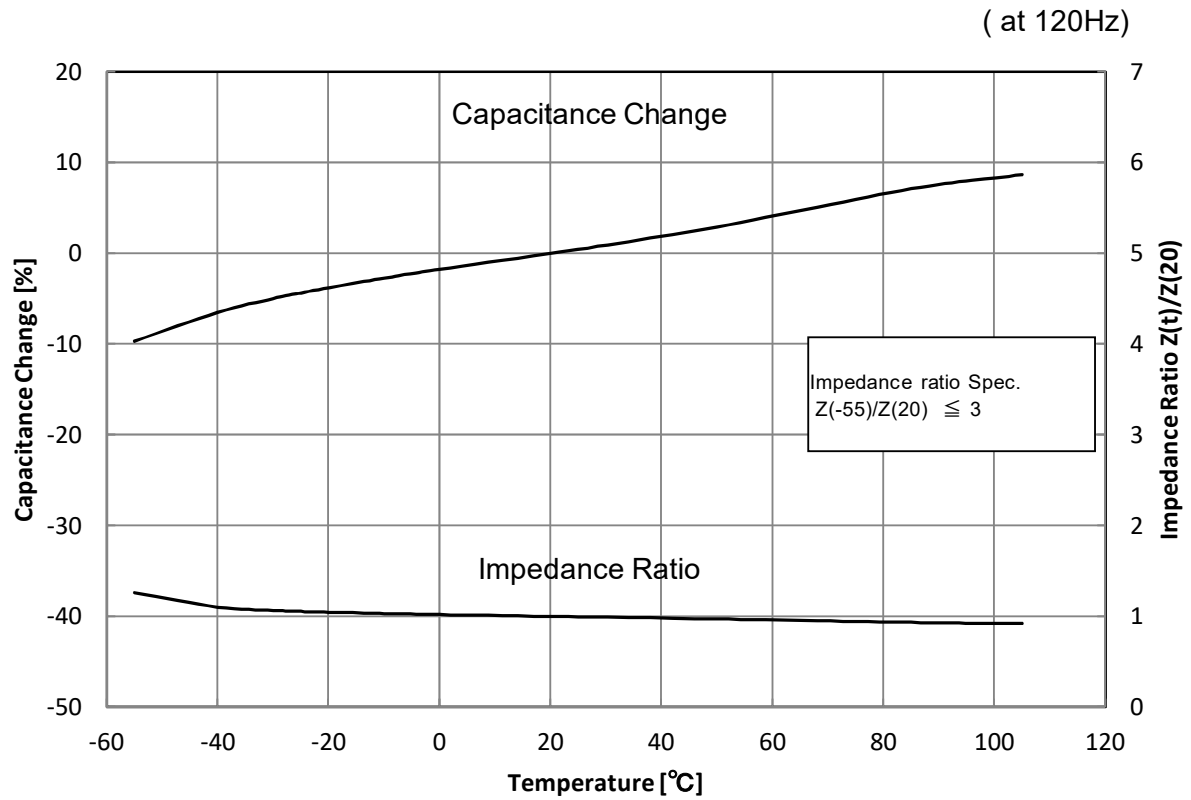

THE TEST RESULT

RUBYCON CORPORATION




PROJECT: Load Life Test	
SAMPLE: 35 JXF 1000 M EFC 12.5X20	SIZE: Dia. 12.5 × 20 L
TESTING METHODS: The capacitor under test shall be applied the rated voltage continuously at 105°C.	APPARATUS: YHP MODEL 4274A LCR METER (at 120Hz)
NOTE: n = 10	

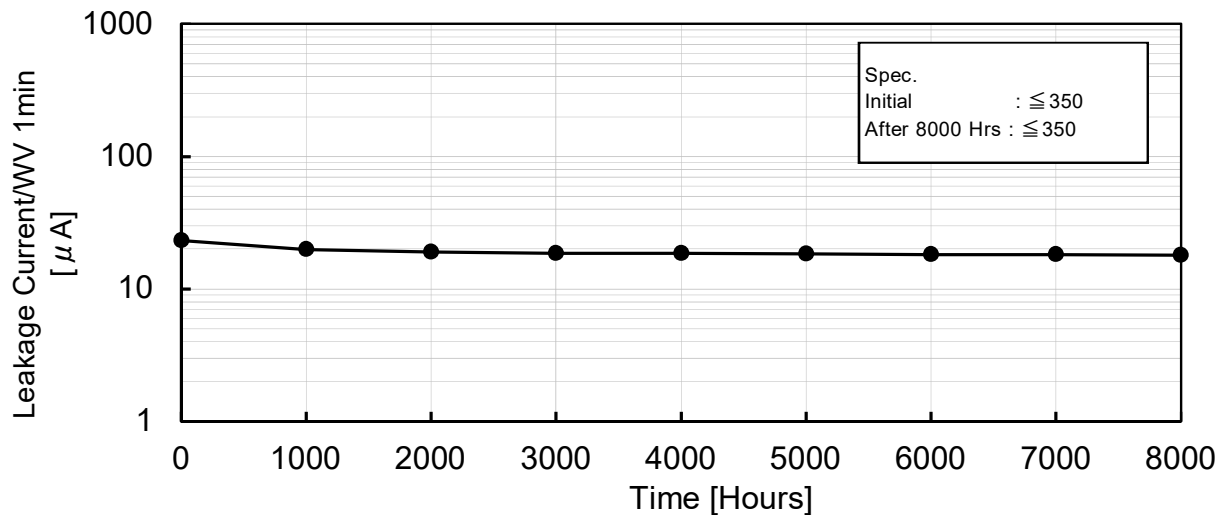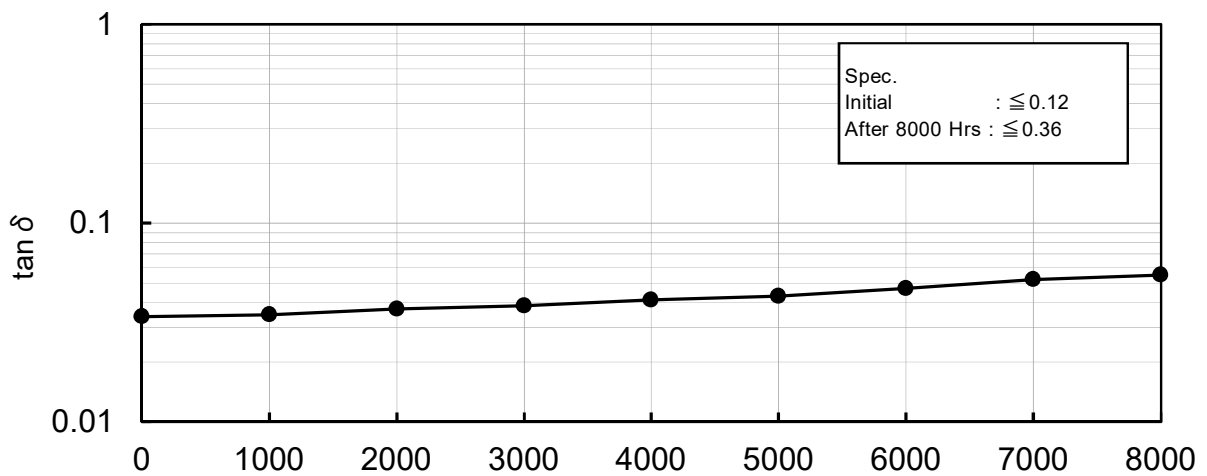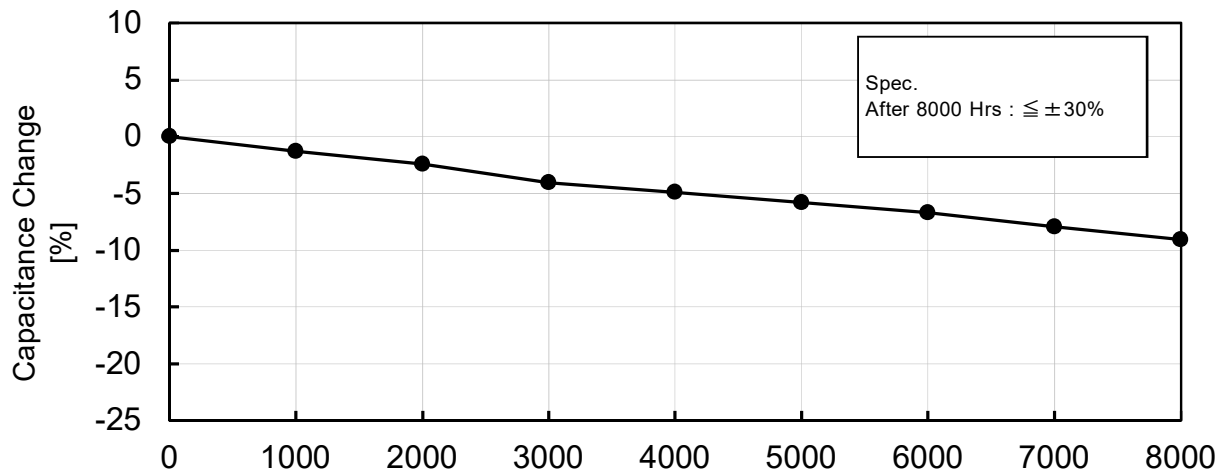

THE TEST RESULT

RUBYCON CORPORATION

PROJECT: Shelf Life Test	
SAMPLE: 35 JXF 1000 M EFC 12.5X20	SIZE: Dia. 12.5 × 20 L
TESTING METHODS: Capacitors shall be stored at 105 ±2°C without loading for 1000 Hrs.	APPARATUS: YHP MODEL 4274A LCR METER (at 120Hz)
NOTE: n = 10	

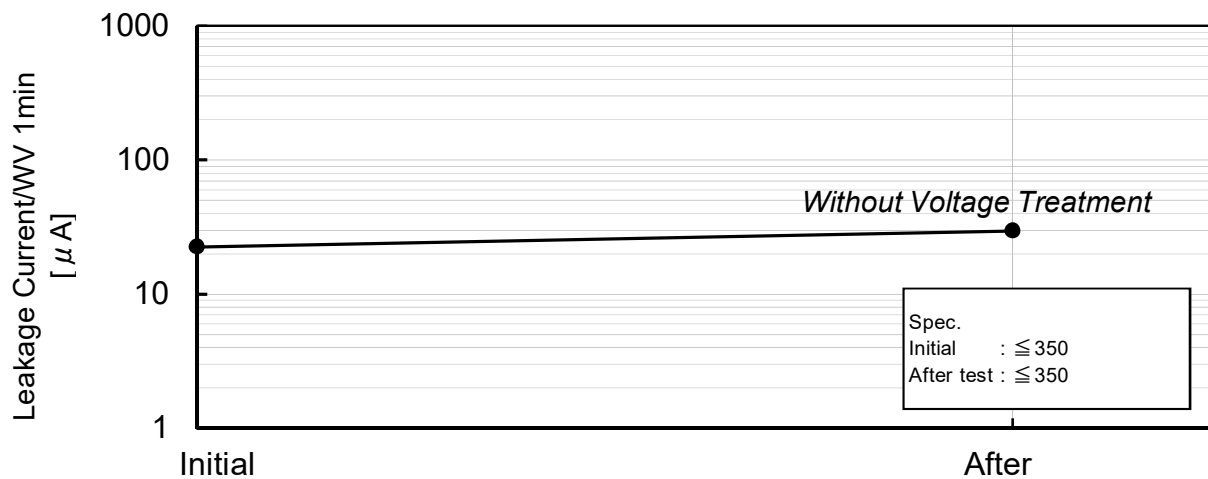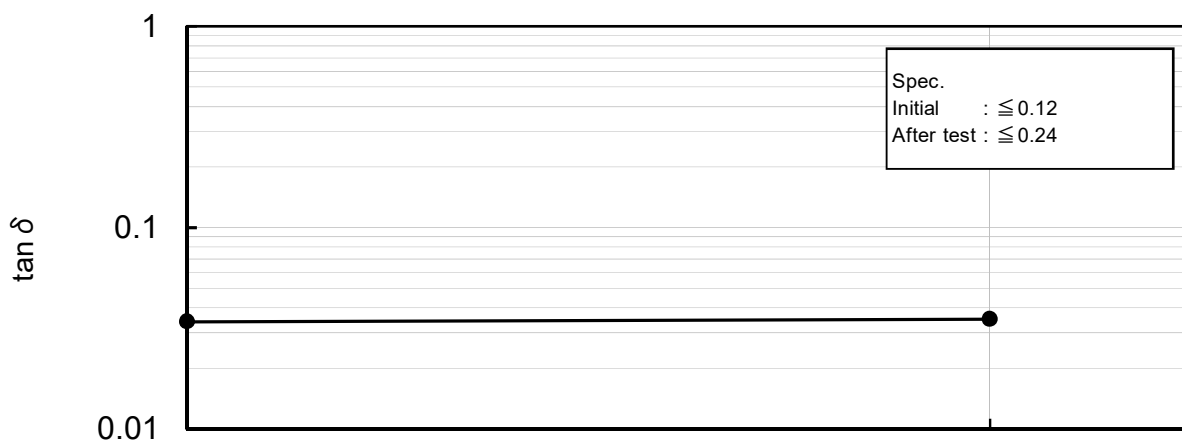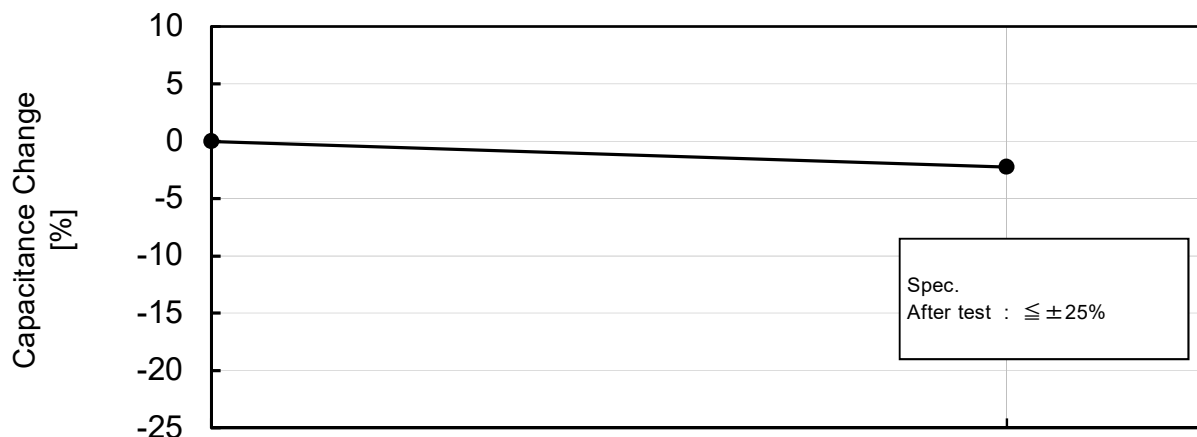

CHARACTERISTICS VS. TEMPERATURE



RUBYCON CORPORATION

SAMPLE :

35 JXF 1000 M EFC 12.5X20

n=3




Apparatus :
Agilent Technologies - E4980A

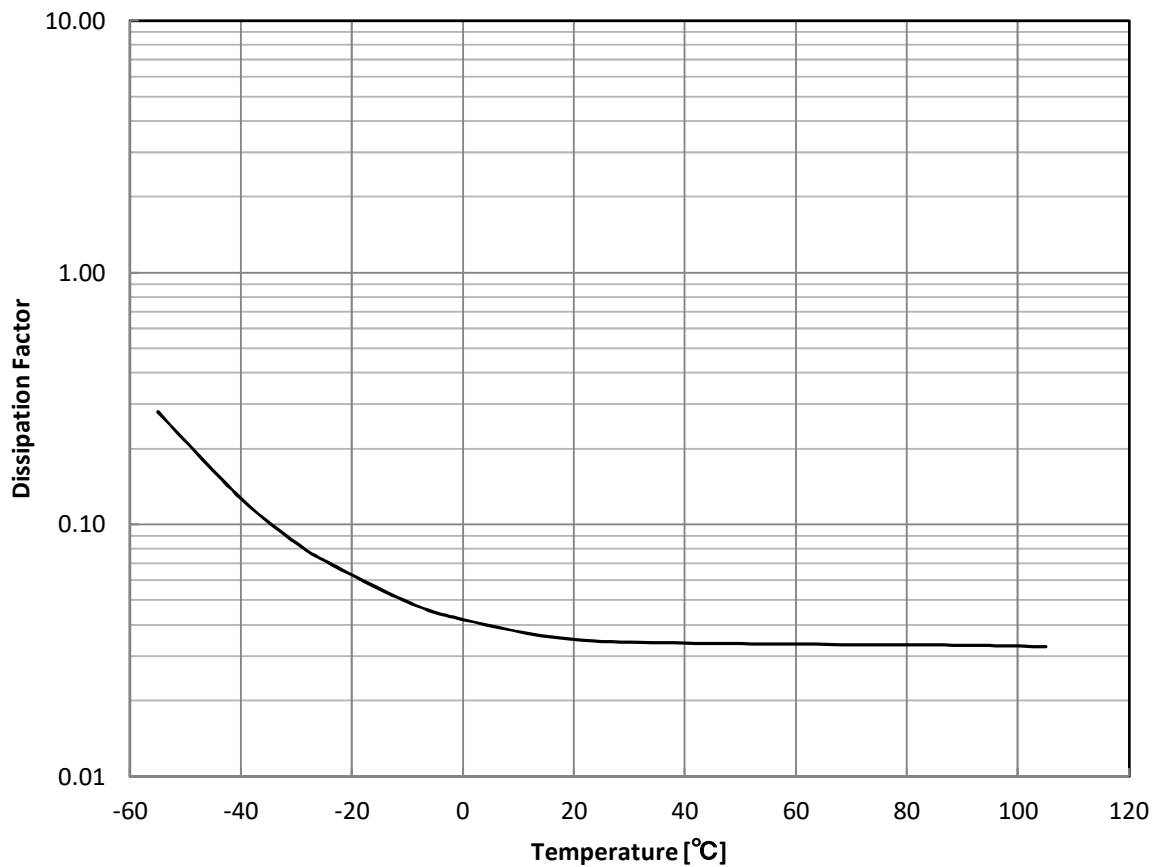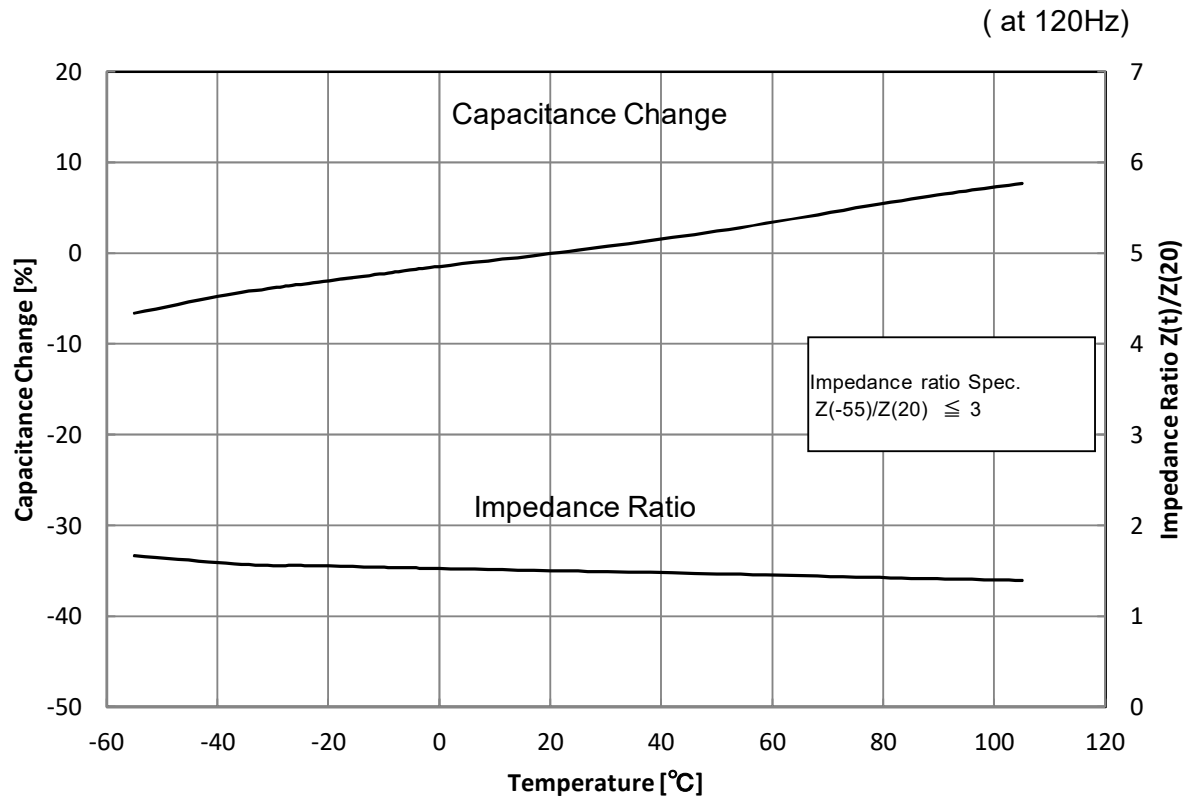

THE TEST RESULT

RUBYCON CORPORATION



PROJECT: Load Life Test	
SAMPLE: 63 JXF 1500 M EFC 18X30	SIZE: Dia. 18 × 30 L
TESTING METHODS: The capacitor under test shall be applied the rated voltage continuously at 105°C.	APPARATUS: YHP MODEL 4274A LCR METER (at 120Hz)
NOTE: n = 10	

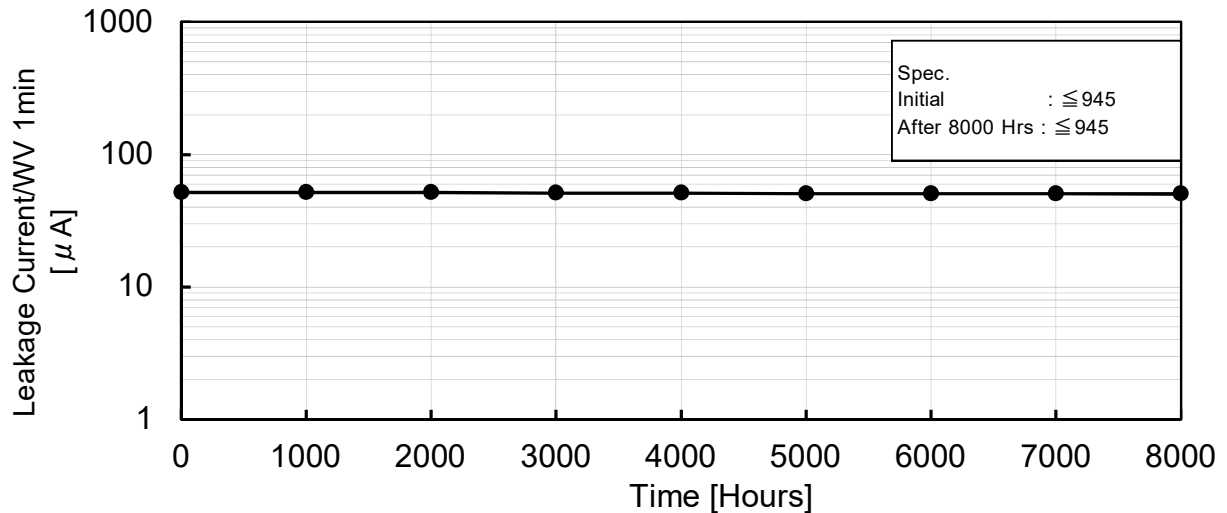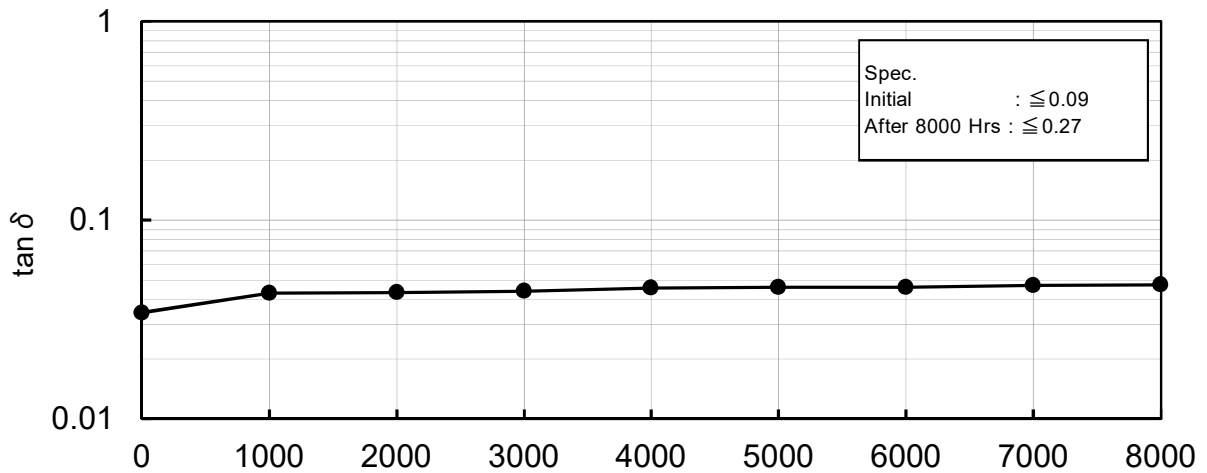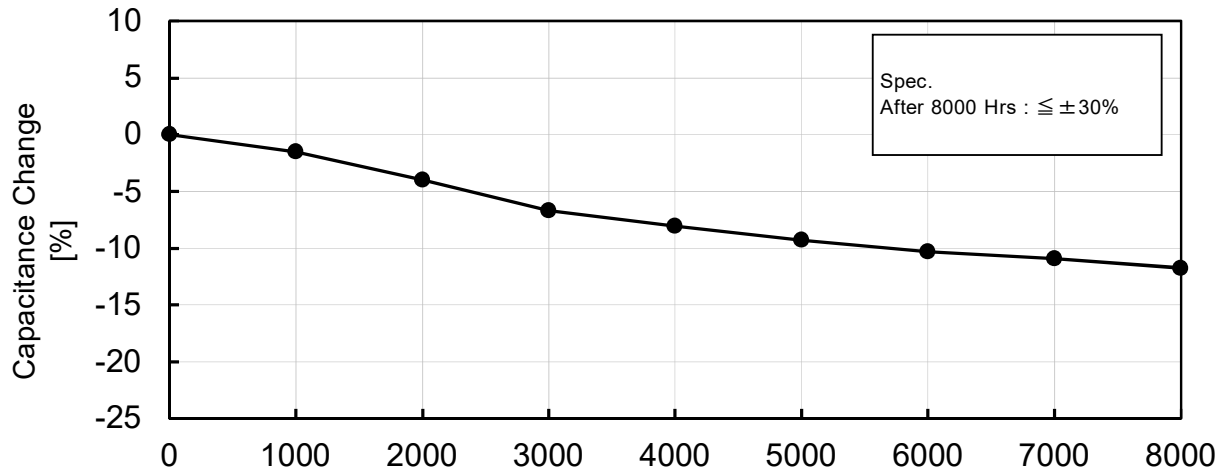

THE TEST RESULT

RUBYCON CORPORATION

PROJECT: Shelf Life Test	
SAMPLE: 63 JXF 1500 M EFC 18X30	SIZE: Dia. 18 × 30 L
TESTING METHODS: Capacitors shall be stored at 105 ±2°C without loading for 1000 Hrs.	APPARATUS: YHP MODEL 4274A LCR METER (at 120Hz)
NOTE: n = 10	

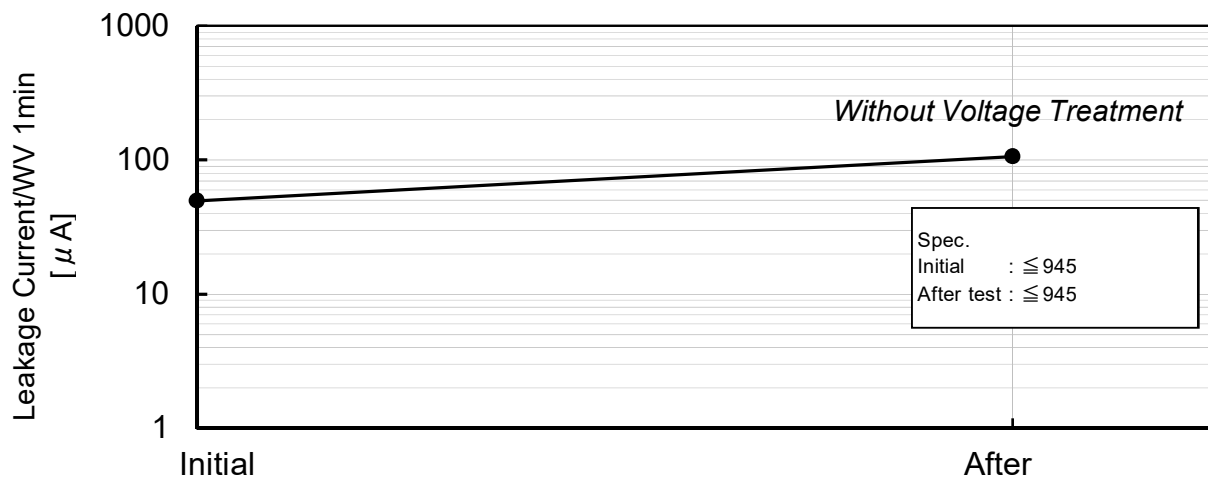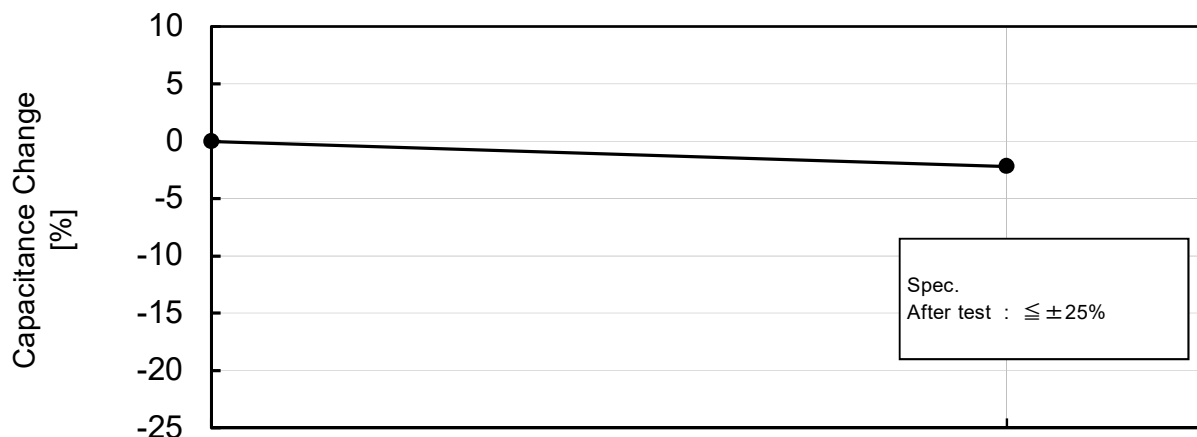

CHARACTERISTICS VS. TEMPERATURE

RUBYCON CORPORATION

SAMPLE :

63 JXF 1500 M EFC 18X30

n=3

Apparatus :
Agilent Technologies - E4980A

