



## RELIABILITY TEST DATA




TEST ITEM :           1) Load Life Test  
                          2) Shelf Life Test  
                          3) CHARACTERISTICS VS. TEMPERATURE

PRODUCTS :           35 TAV 100 M 6.3X8

# THE TEST RESULT

RUBYCON CORPORATION




PROJECT: Load Life Test	
SAMPLE: 35 TAV 100 M 6.3X8	SIZE: Dia. 6.3 × 8 L
TESTING METHODS: The capacitor under test shall be applied the rated voltage continuously at 125°C.	APPARATUS: YHP MODEL 4274A LCR METER (at 120Hz)
NOTE: n = 10	

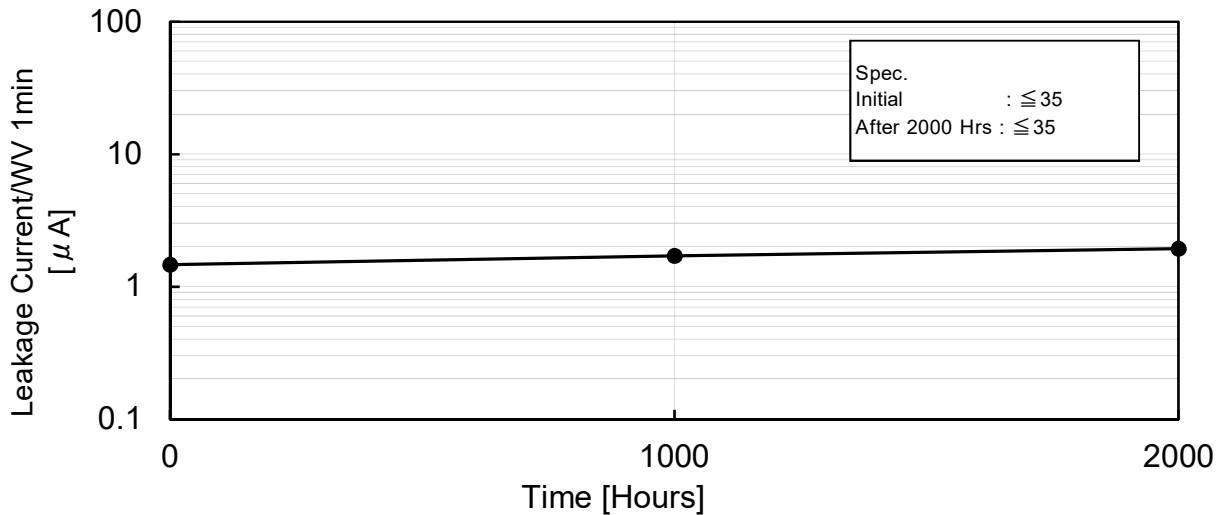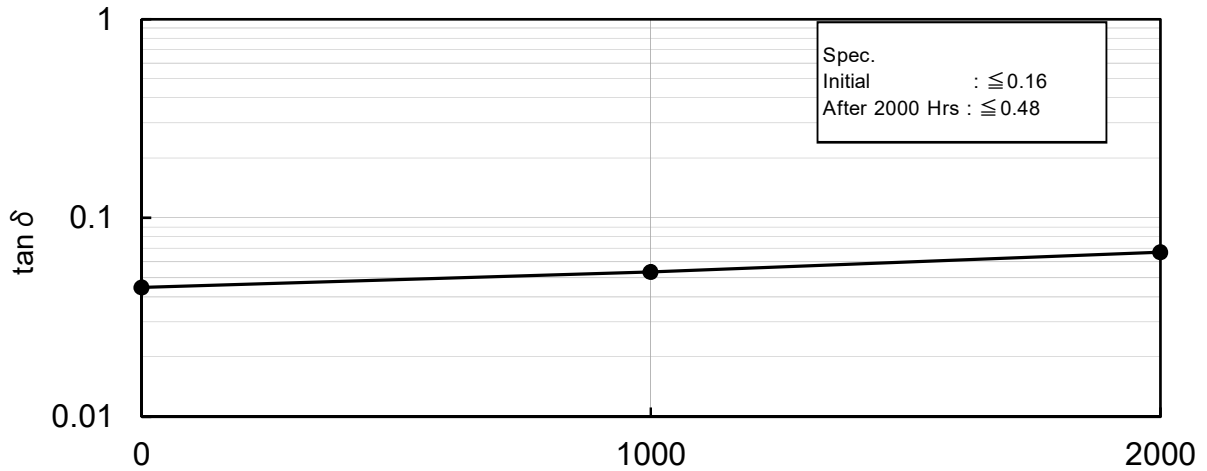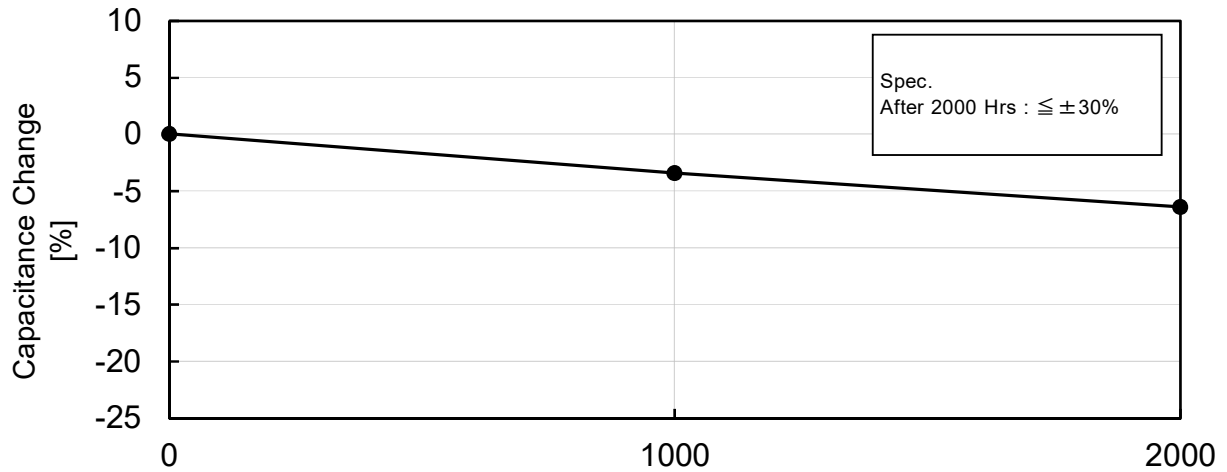

# THE TEST RESULT

RUBYCON CORPORATION

PROJECT: Shelf Life Test	
SAMPLE: 35 TAV 100 M 6.3X8	SIZE: Dia. 6.3 × 8 L
TESTING METHODS: Capacitors shall be stored at 125 ±2°C without loading for 500 Hrs.	APPARATUS: YHP MODEL 4274A LCR METER (at 120Hz)
NOTE: n = 10	

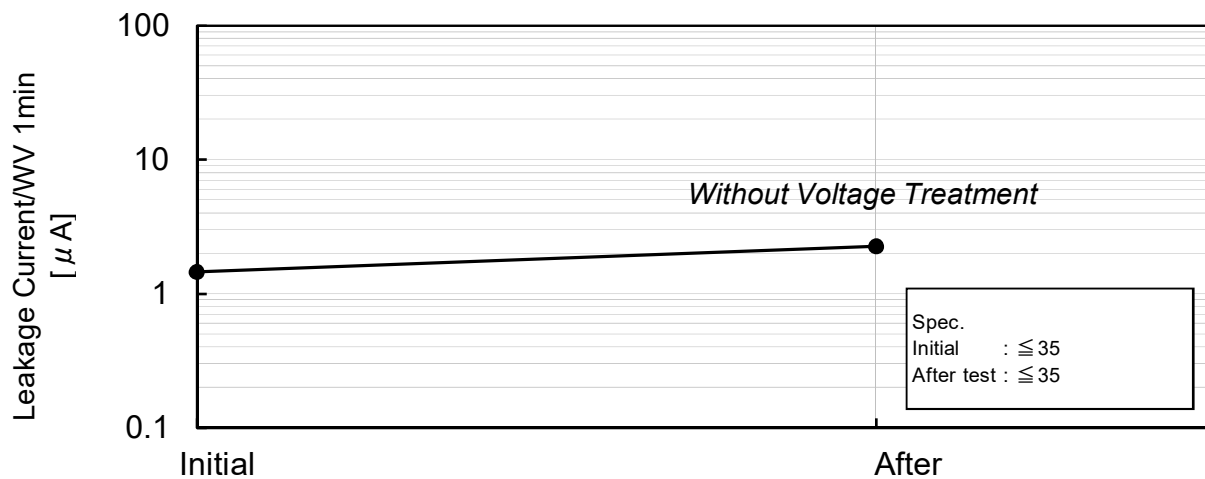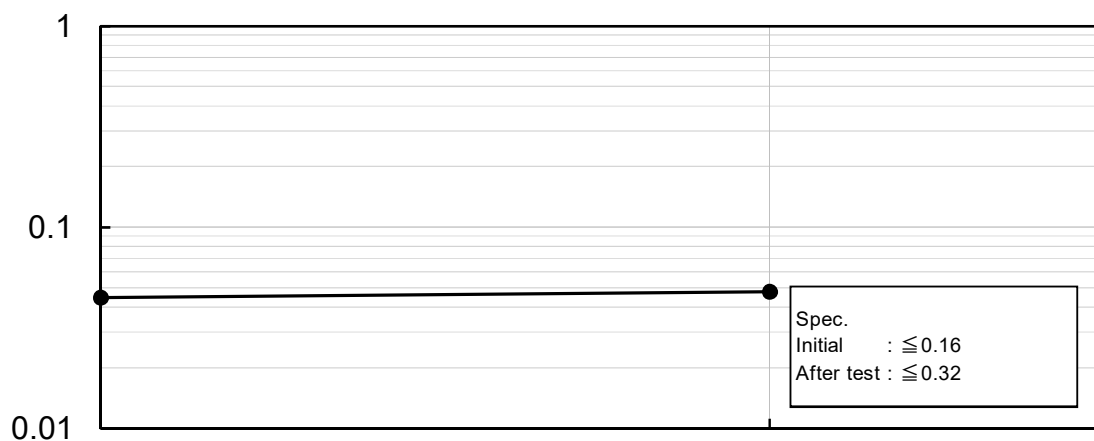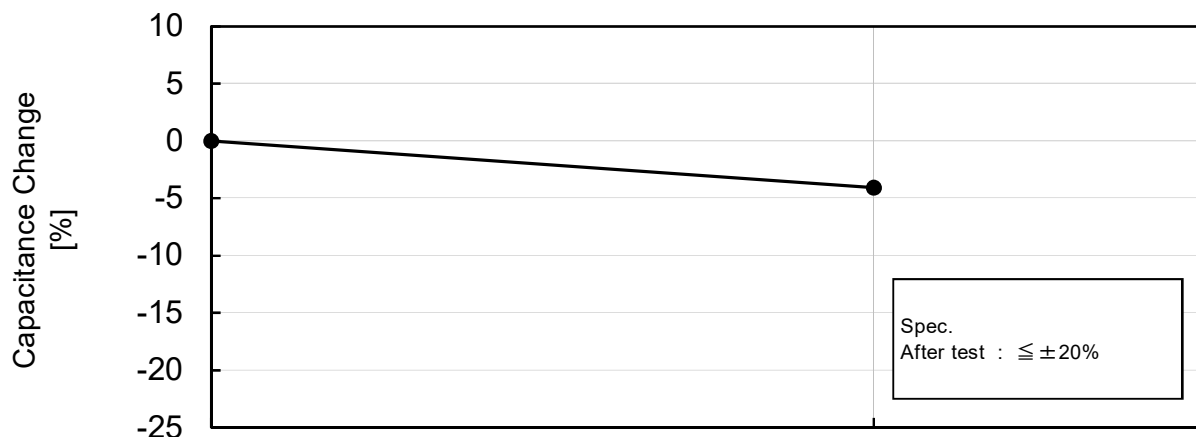

# CHARACTERISTICS VS. TEMPERATURE

RUBYCON CORPORATION

SAMPLE :

35 TAV 100 M 6.3X8

n=3

Apparatus :  
Agilent Technologies - E4980A

