



## RELIABILITY TEST DATA




TEST ITEM :           1) Load Life Test  
                          2) Shelf Life Test  
                          3) CHARACTERISTICS VS. TEMPERATURE

PRODUCTS :           35 TNV 330 M 8X10.5  
                          35 TNV 560 M 10X10.5

# THE TEST RESULT

RUBYCON CORPORATION




PROJECT: Load Life Test	
SAMPLE: 35 TNV 330 M 8X10.5	SIZE: Dia. 8 × 10.5 L
TESTING METHODS: The capacitor under test shall be applied the rated voltage continuously at 105°C.	APPARATUS: YHP MODEL 4274A LCR METER (at 120Hz)
NOTE: n = 10	

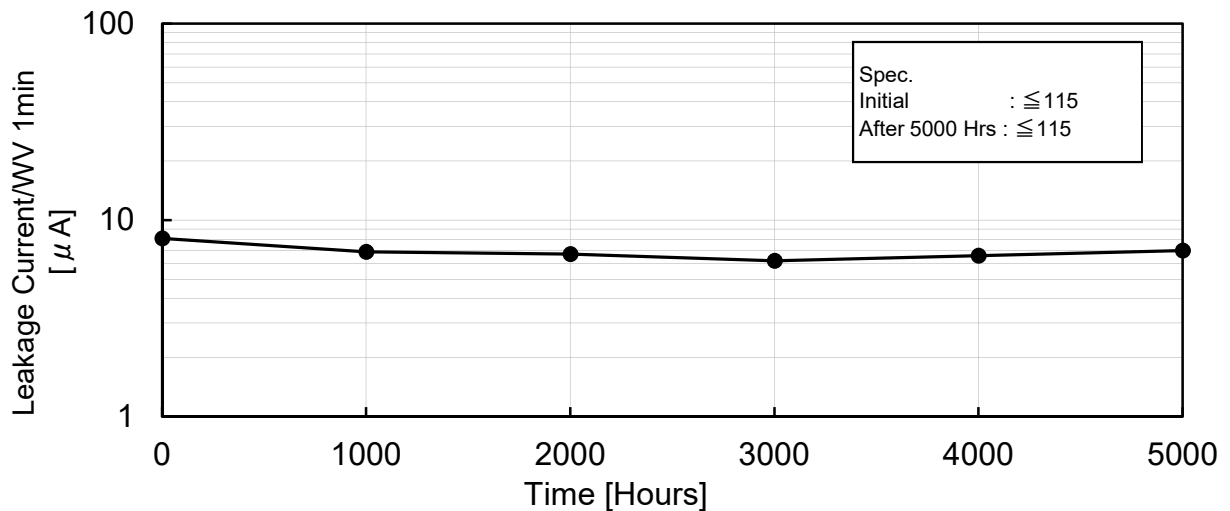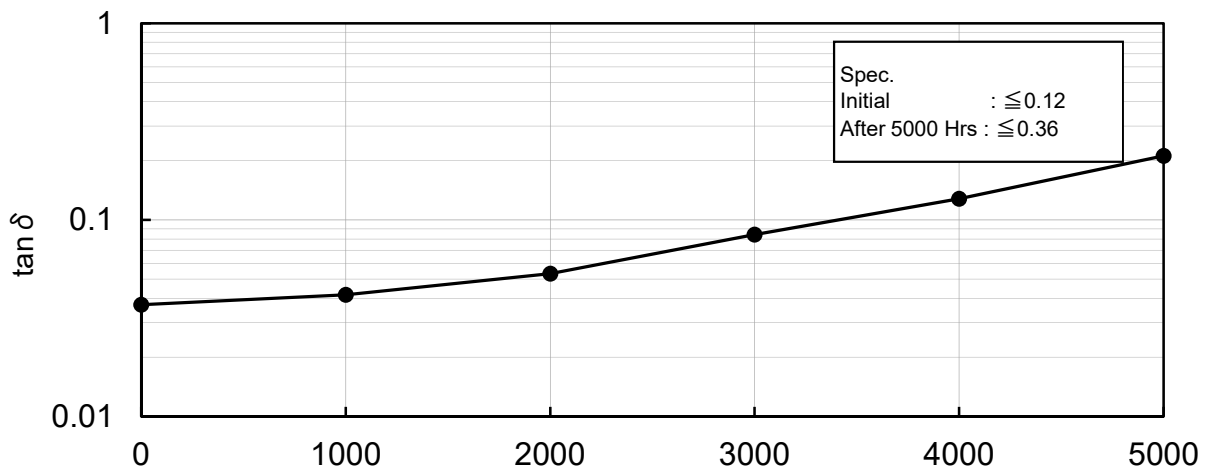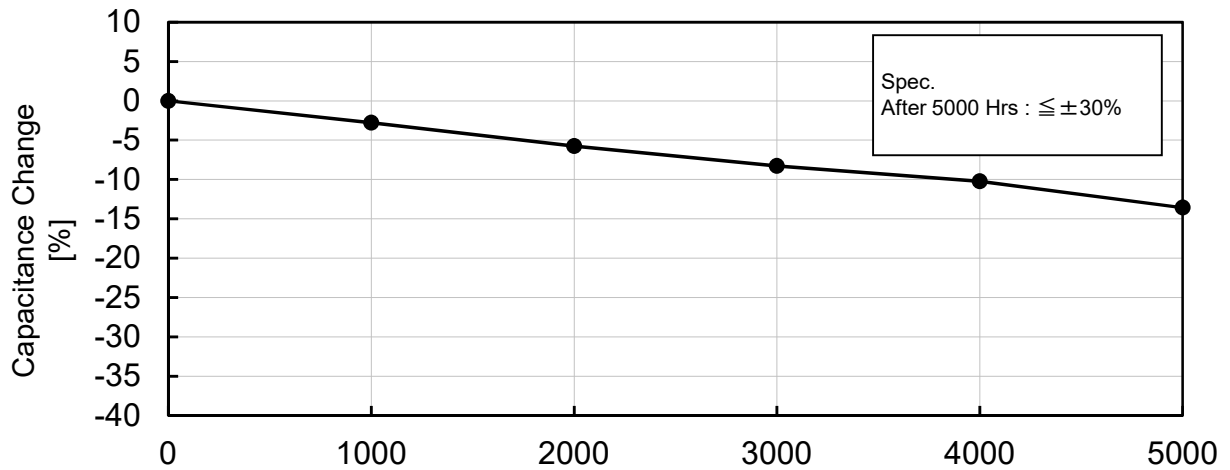

# THE TEST RESULT

RUBYCON CORPORATION

PROJECT: Shelf Life Test	
SAMPLE: 35 TNV 330 M 8X10.5	SIZE: Dia. 8 × 10.5 L
TESTING METHODS:  Capacitors shall be stored at 105 ±2°C without loading for 1000 Hrs.	APPARATUS:  YHP MODEL 4274A LCR METER (at 120Hz)
NOTE: n = 10	

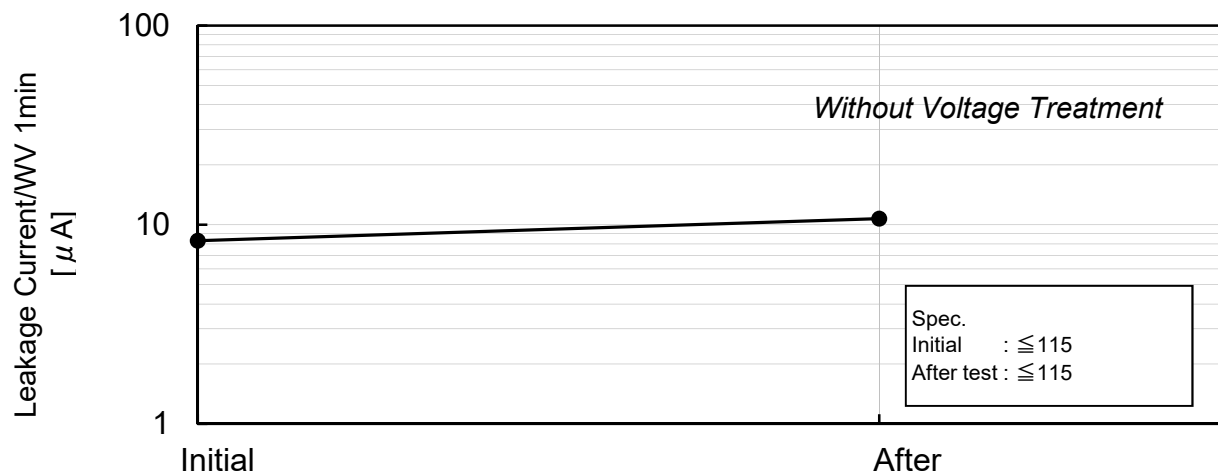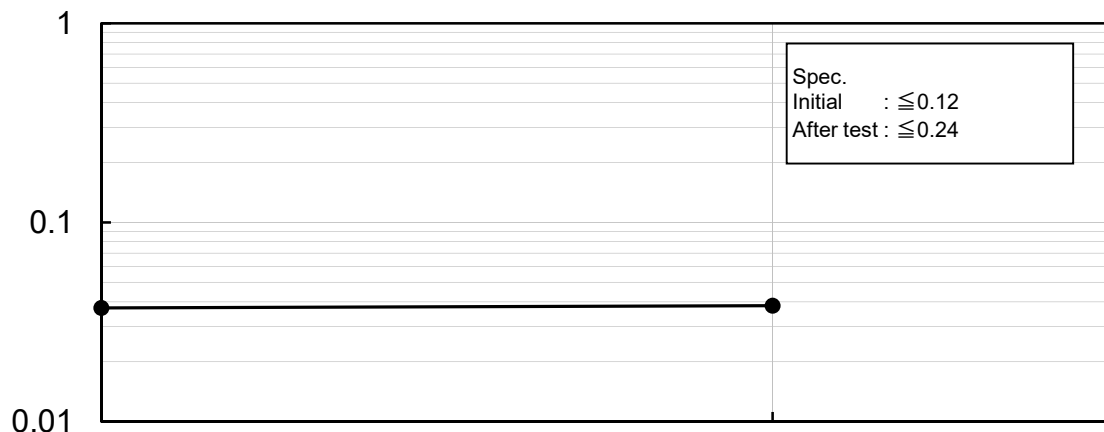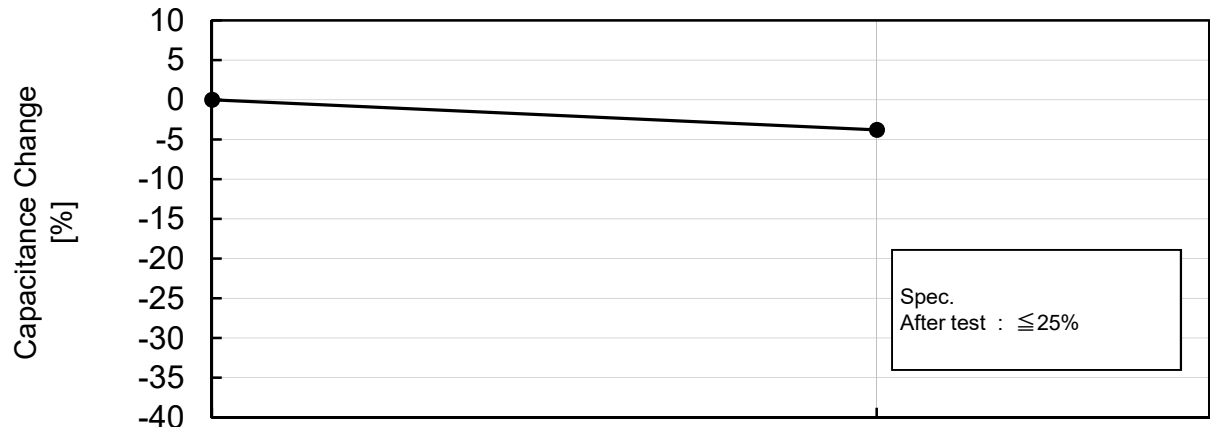

# CHARACTERISTICS VS. TEMPERATURE



RUBYCON CORPORATION

SAMPLE :

35 TNV 330 M 8X10.5

n=3




Apparatus :  
Agilent Technologies - E4980A

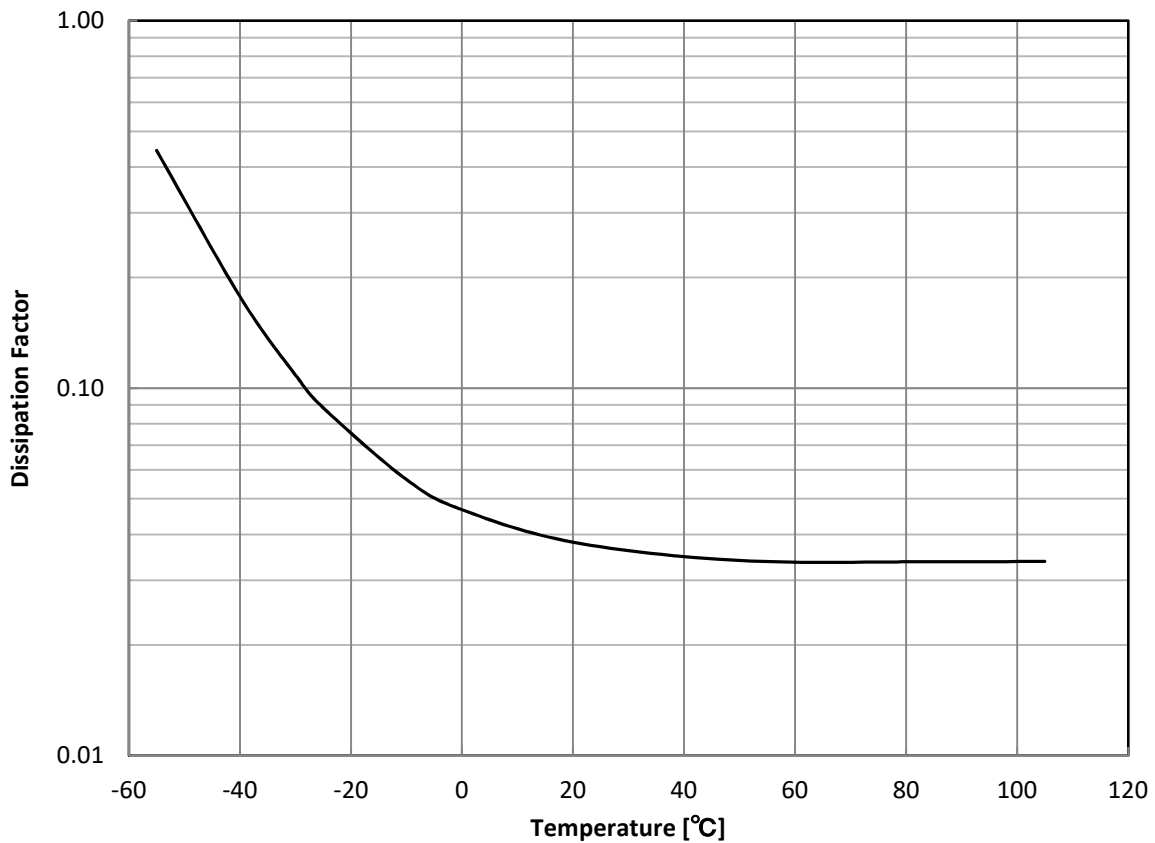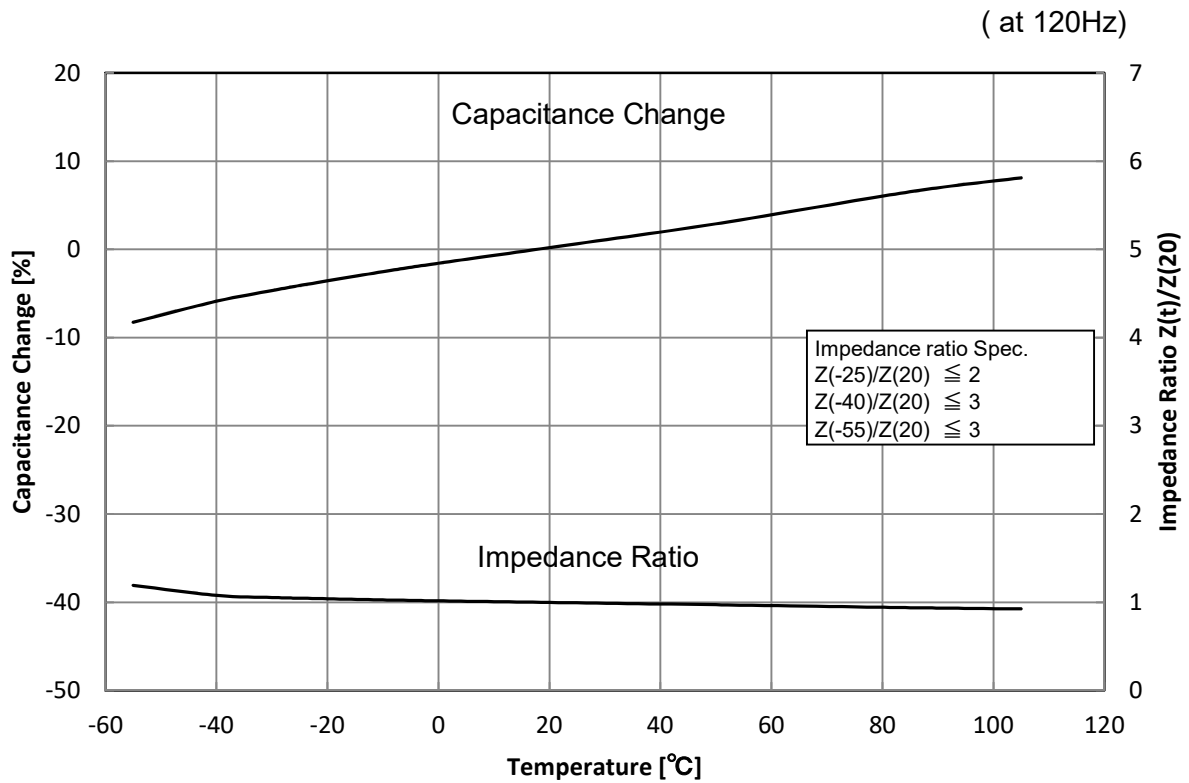

# THE TEST RESULT

RUBYCON CORPORATION




PROJECT: Load Life Test	
SAMPLE: 35 TNV 560 M 10X10.5	SIZE: Dia. 10 × 10.5 L
TESTING METHODS: The capacitor under test shall be applied the rated voltage continuously at 105°C.	APPARATUS: YHP MODEL 4274A LCR METER (at 120Hz)
NOTE: n = 10	

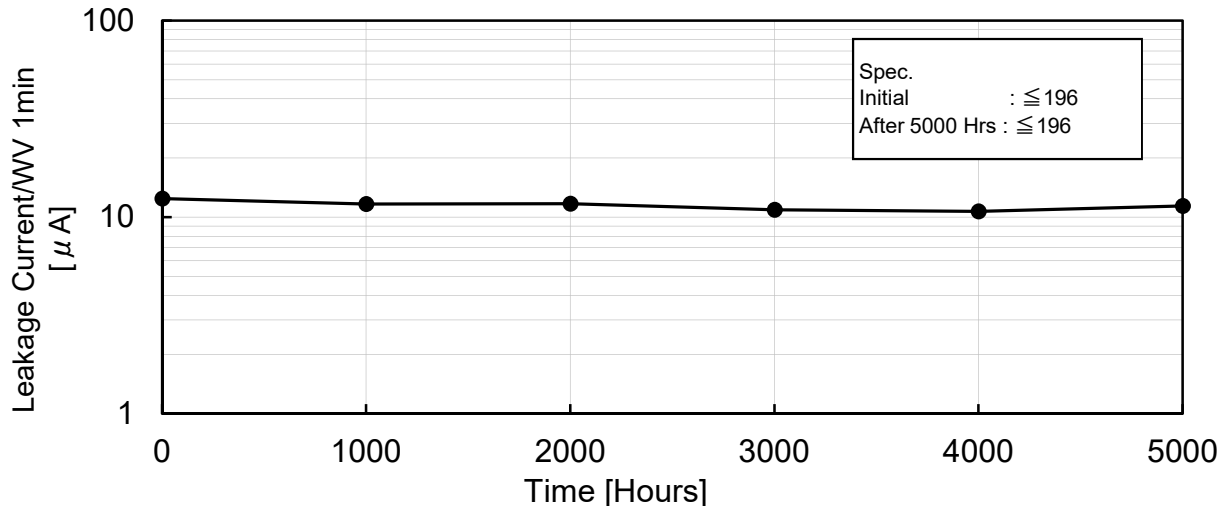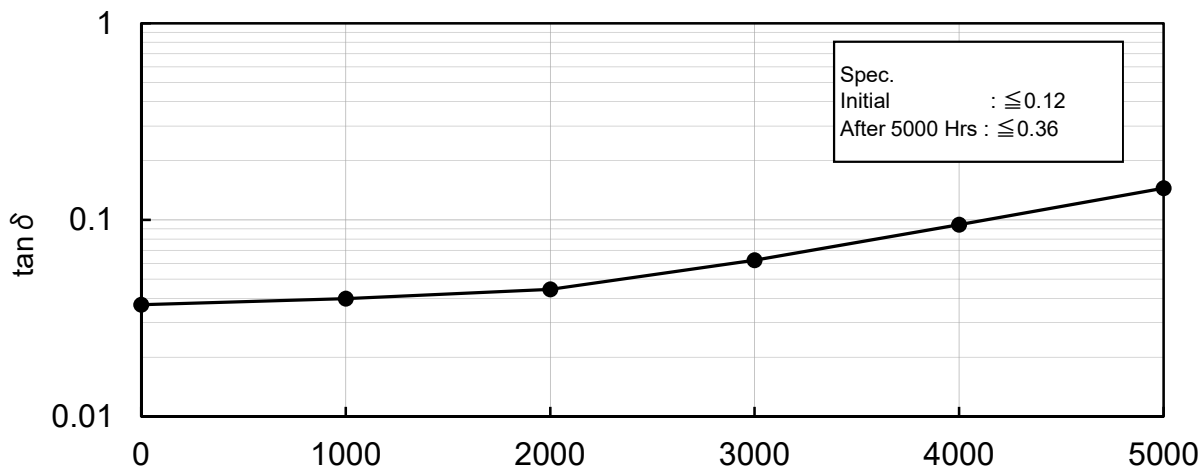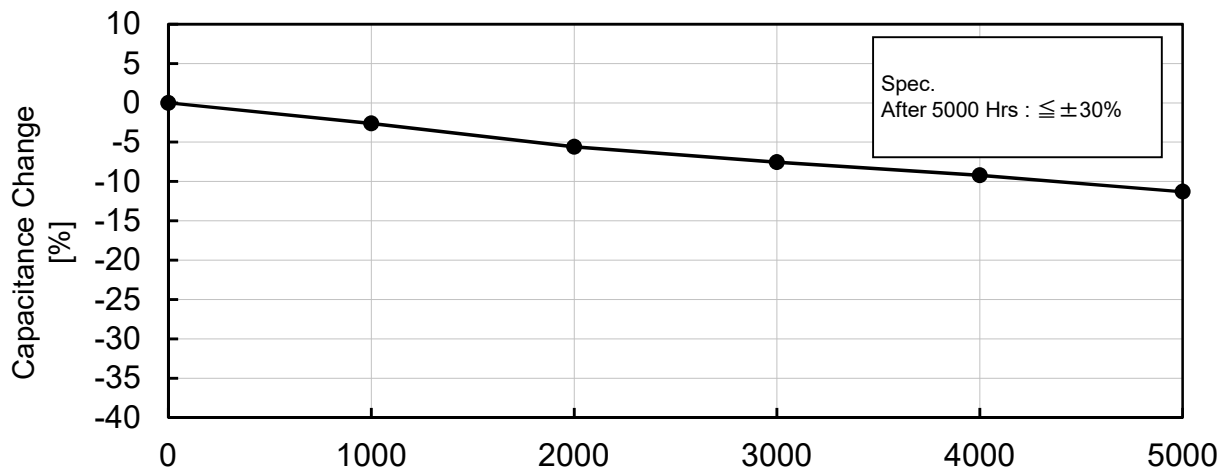

# THE TEST RESULT

RUBYCON CORPORATION

PROJECT: Shelf Life Test	
SAMPLE: 35 TNV 560 M 10X10.5	SIZE: Dia. 10 × 10.5 L
TESTING METHODS:  Capacitors shall be stored at 105 ±2°C without loading for 1000 Hrs.	APPARATUS:  YHP MODEL 4274A LCR METER (at 120Hz)
NOTE: n = 10	

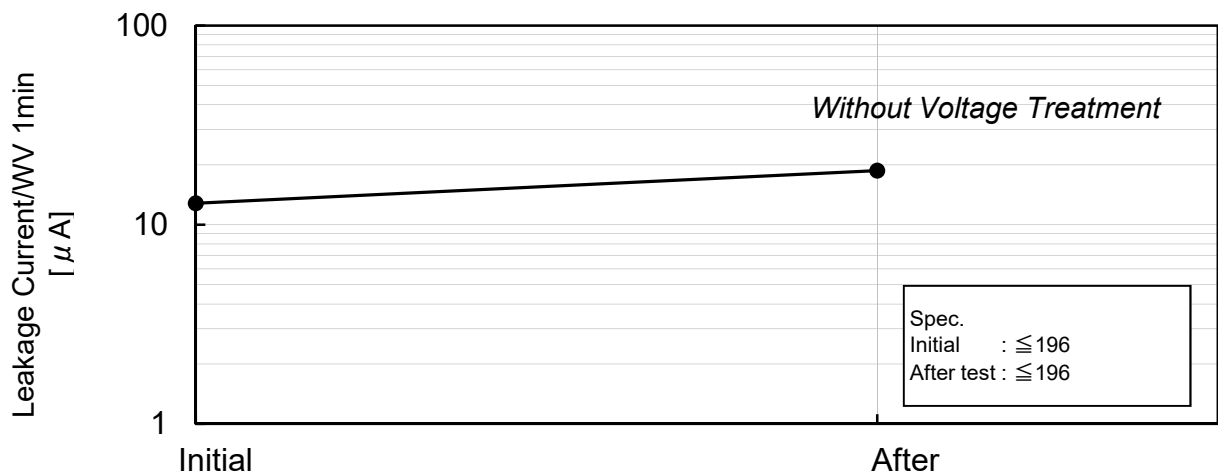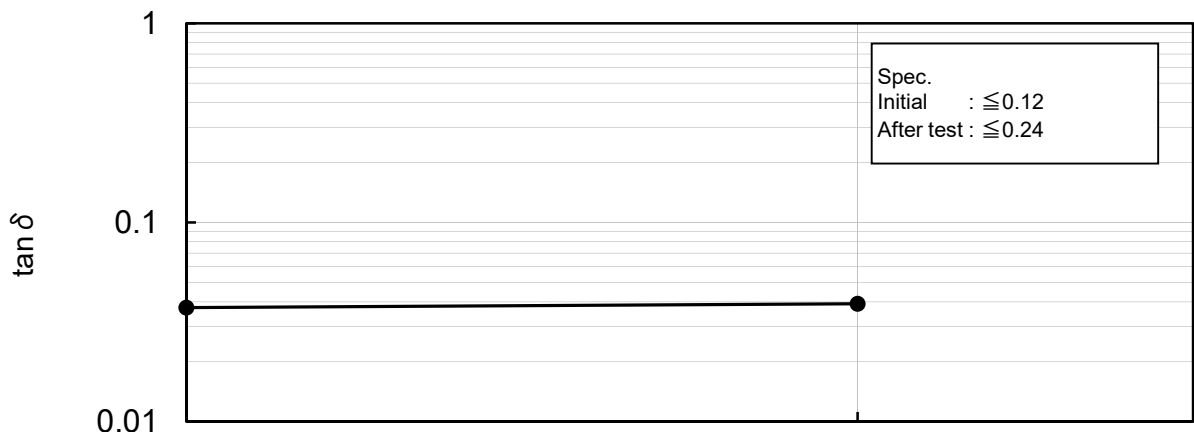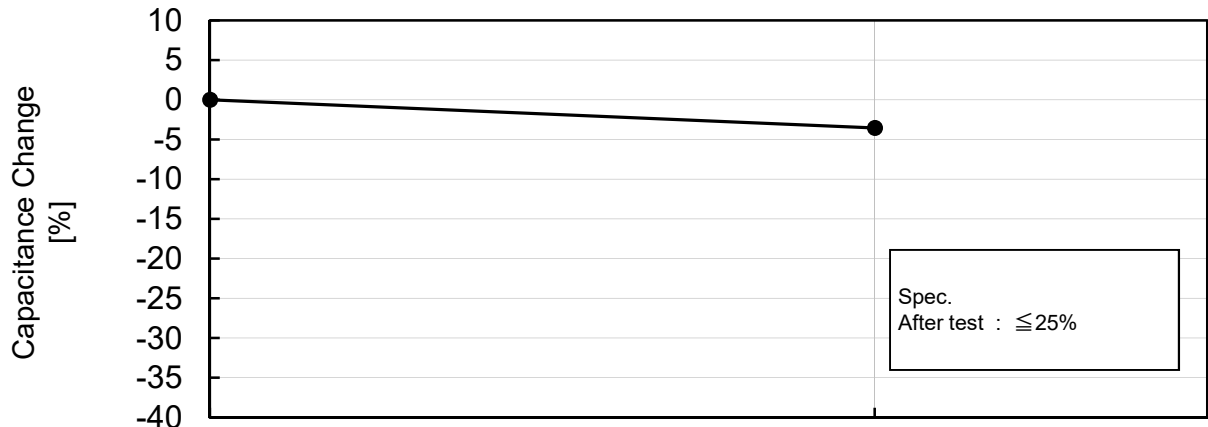

# CHARACTERISTICS VS. TEMPERATURE

RUBYCON CORPORATION

SAMPLE :

35 TNV 560 M 10X10.5

n=3

Apparatus :  
Agilent Technologies - E4980A

