



TEST DATA




TEST ITEM :
1) Load Life Test
2) Shelf Life Test
3) CHARACTERISTICS VS. TEMPERATURE

PRODUCTS :
6.3 TRV 2200 M 12.5X13.5
25 TRV 220 M 8X10.5
50 TRV 10 M 6.3X6.1

THE TEST RESULT

RUBYCON CORPORATION




PROJECT: Load Life Test	
SAMPLE: 6.3 TRV 2200 M 12.5X13.5	SIZE: Dia. 12.5 × 13.5 L
TESTING METHODS: The capacitor under test shall be applied the rated voltage continuously at 105°C.	APPARATUS: YHP MODEL 4274A LCR METER (at 120Hz)
NOTE: n = 10	

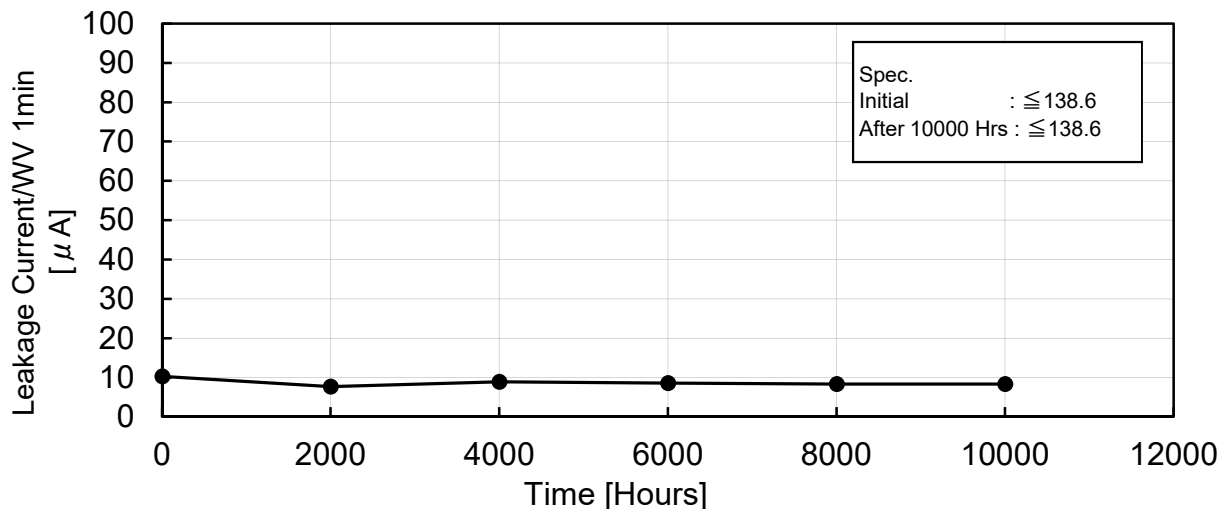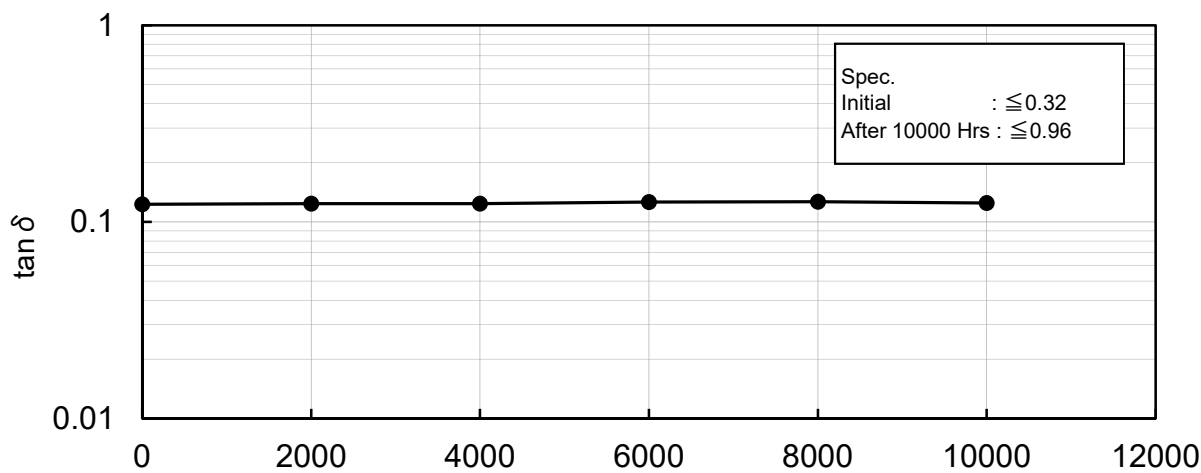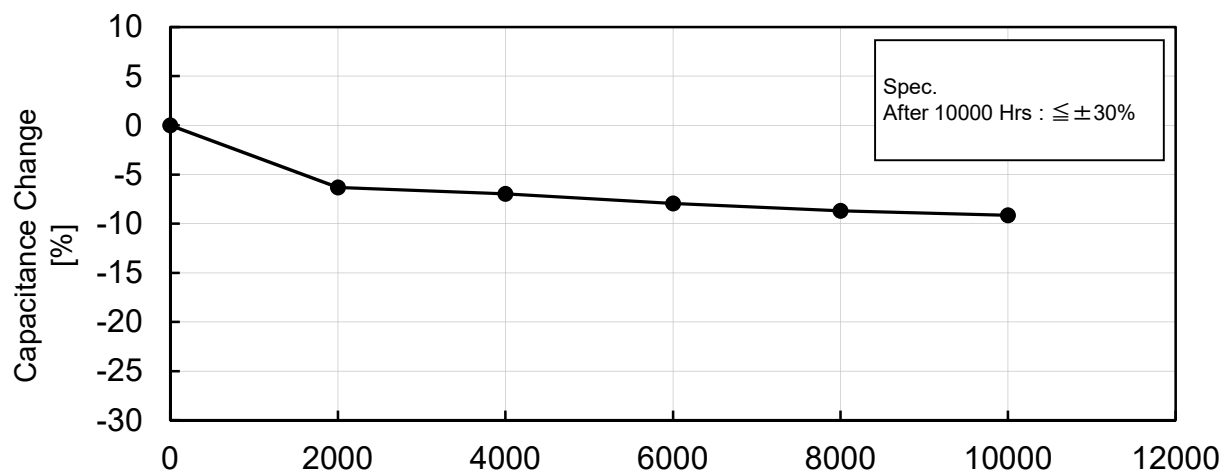

THE TEST RESULT

RUBYCON CORPORATION

PROJECT: Shelf Life Test	
SAMPLE: 6.3 TRV 2200 M 12.5X13.5	SIZE: Dia. 12.5 × 13.5 L
TESTING METHODS: Capacitors shall be stored at 105 ±2°C without loading for 1000 Hrs.	APPARATUS: YHP MODEL 4274A LCR METER (at 120Hz)
NOTE: n = 10	

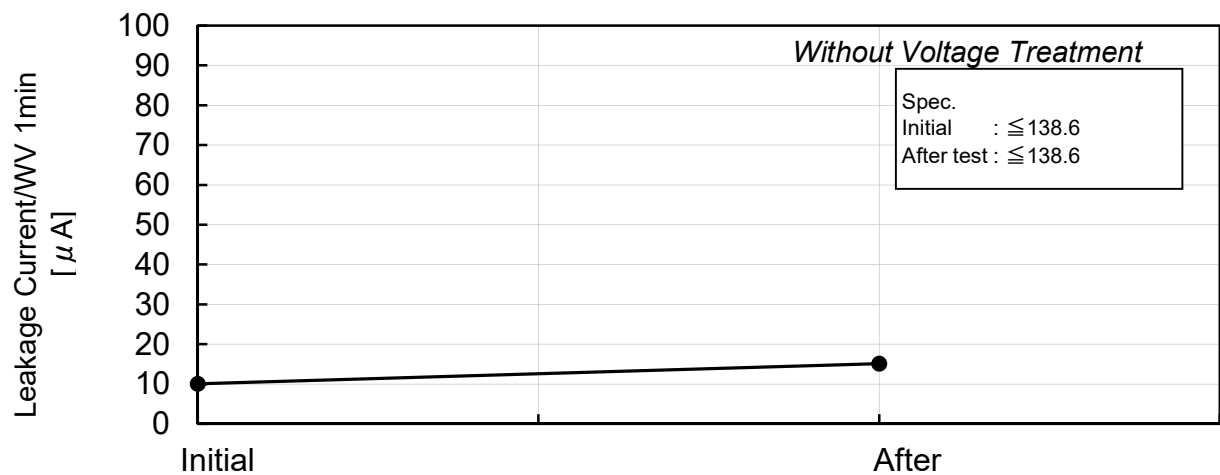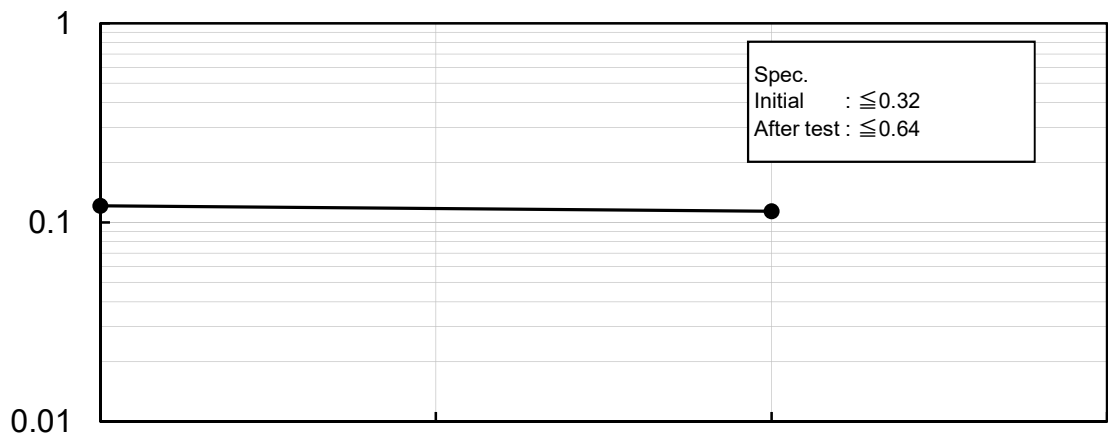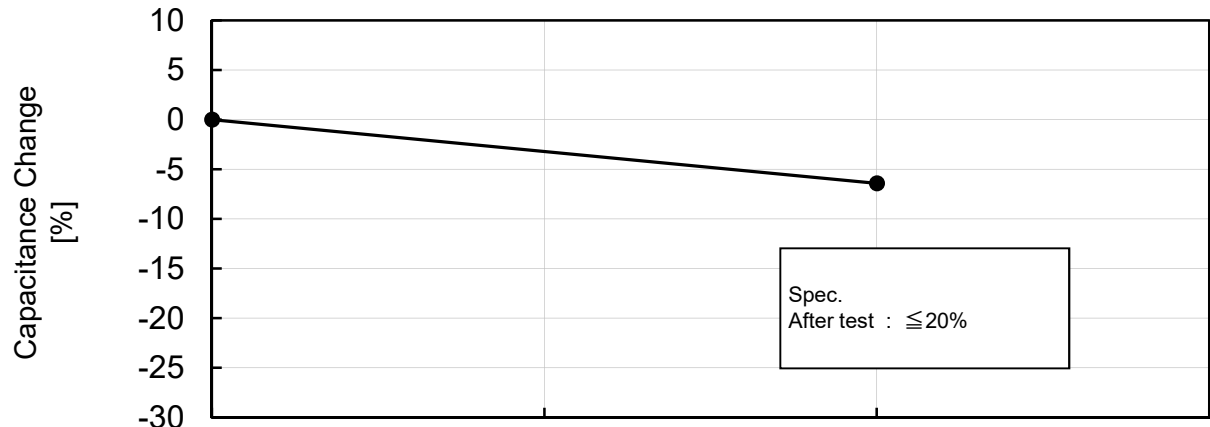

CHARACTERISTICS VS. TEMPERATURE



RUBYCON CORPORATION

SAMPLE :

6.3 TRV 2200 M 12.5X13.5

n=3




Apparatus :
Agilent Technologies - E4980A

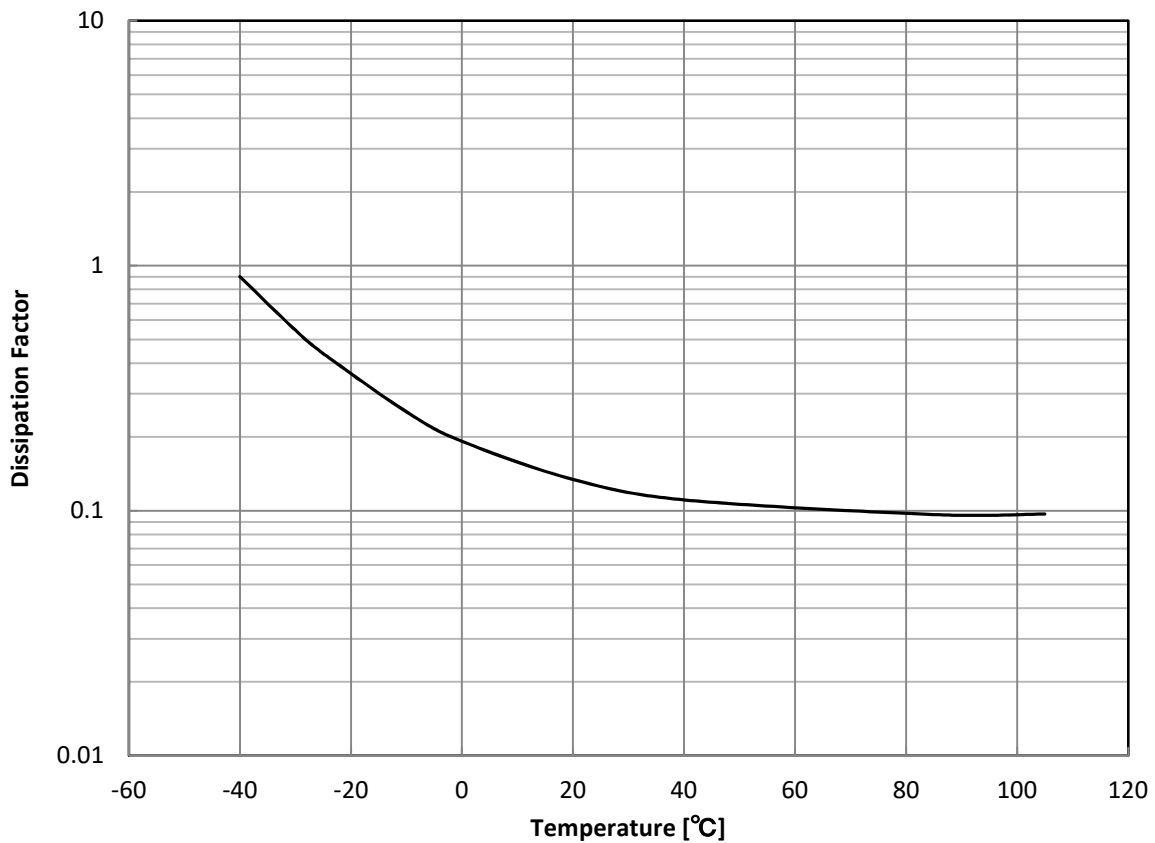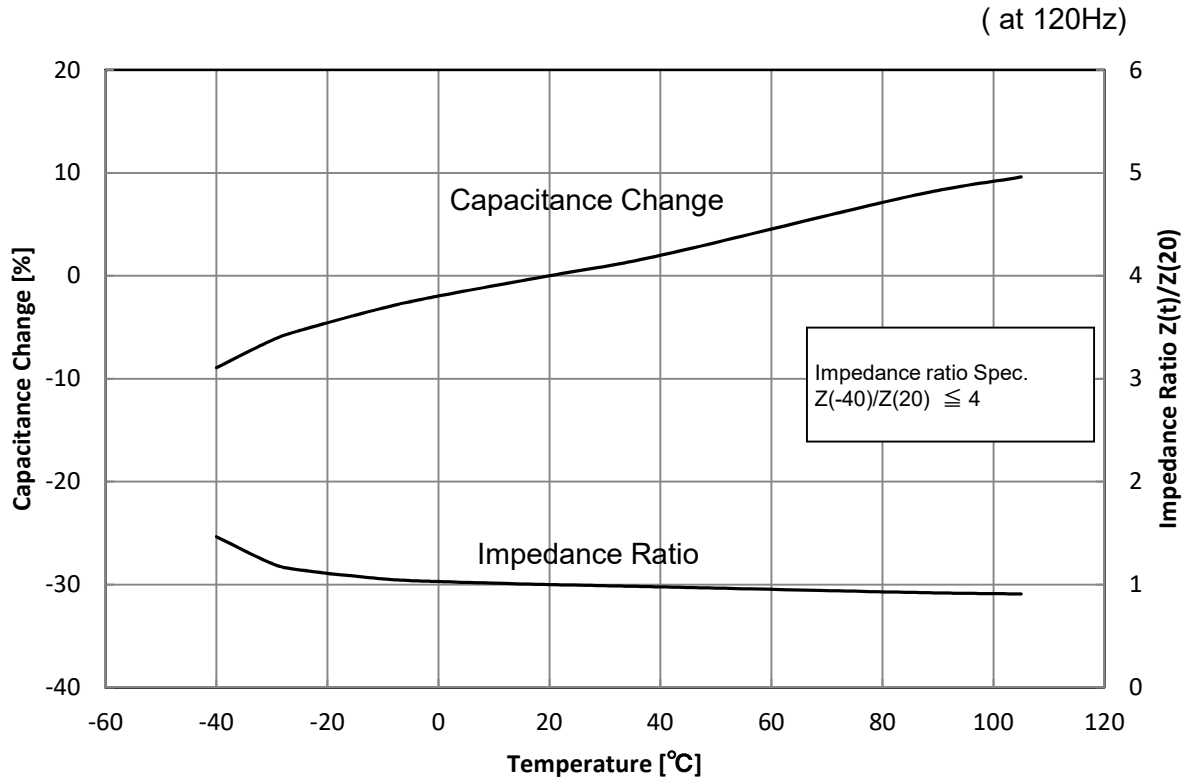

THE TEST RESULT

RUBYCON CORPORATION



PROJECT: Load Life Test	
SAMPLE: 25 TRV 220 M 8X10.5	SIZE: Dia. 8 × 10.5 L
TESTING METHODS: The capacitor under test shall be applied the rated voltage continuously at 105°C.	APPARATUS: YHP MODEL 4274A LCR METER (at 120Hz)
NOTE: n = 10	

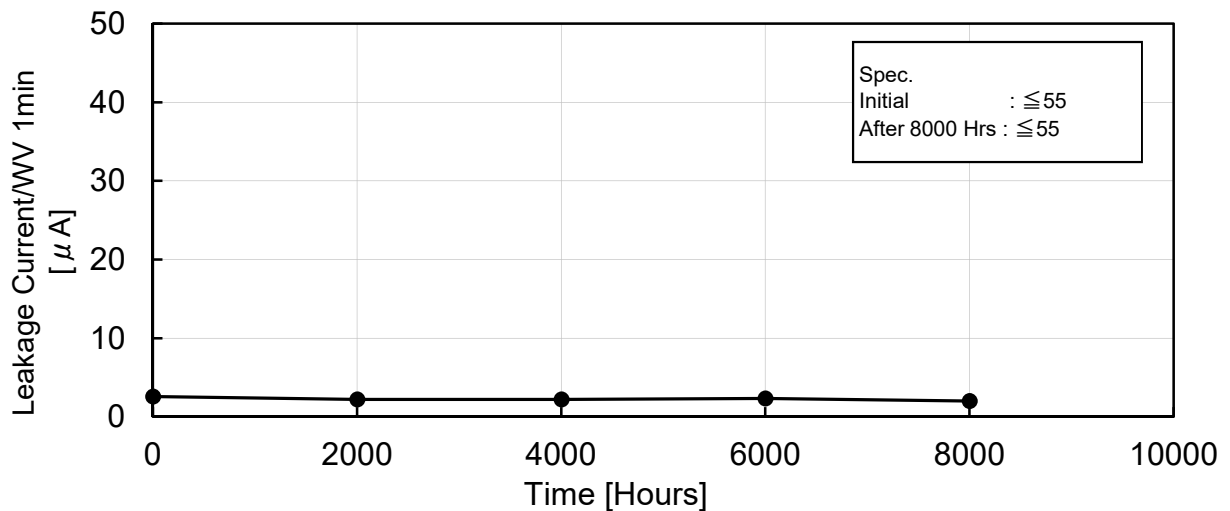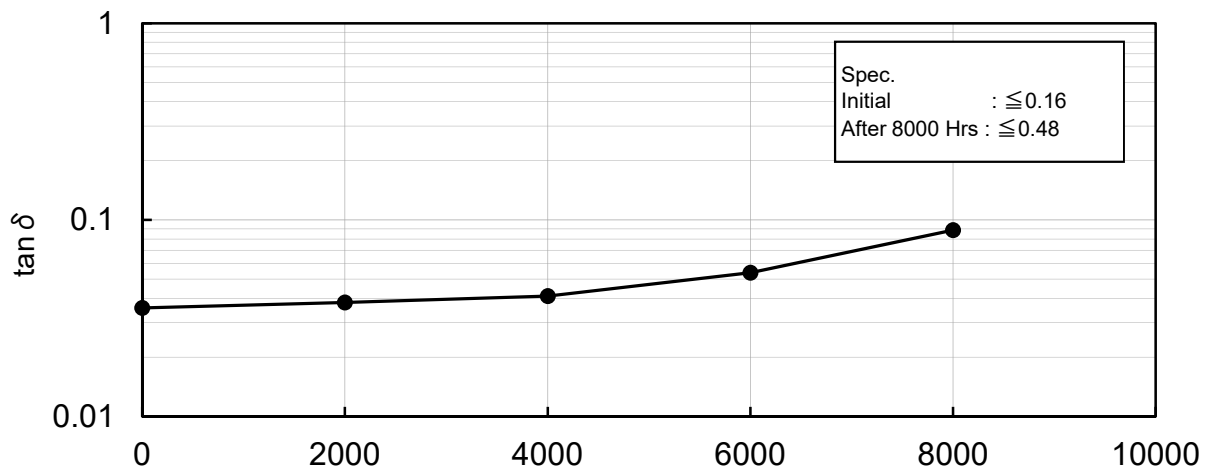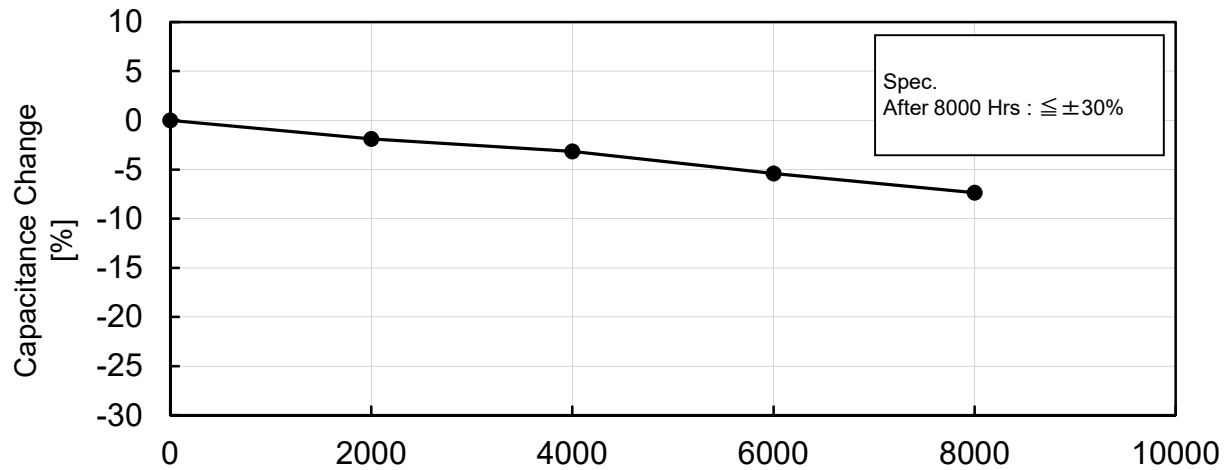

THE TEST RESULT

RUBYCON CORPORATION

PROJECT: Shelf Life Test	
SAMPLE: 25 TRV 220 M 8X10.5	SIZE: Dia. 8 × 10.5 L
TESTING METHODS: Capacitors shall be stored at 105 ±2°C without loading for 1000 Hrs.	APPARATUS: YHP MODEL 4274A LCR METER (at 120Hz)
NOTE: n = 10	

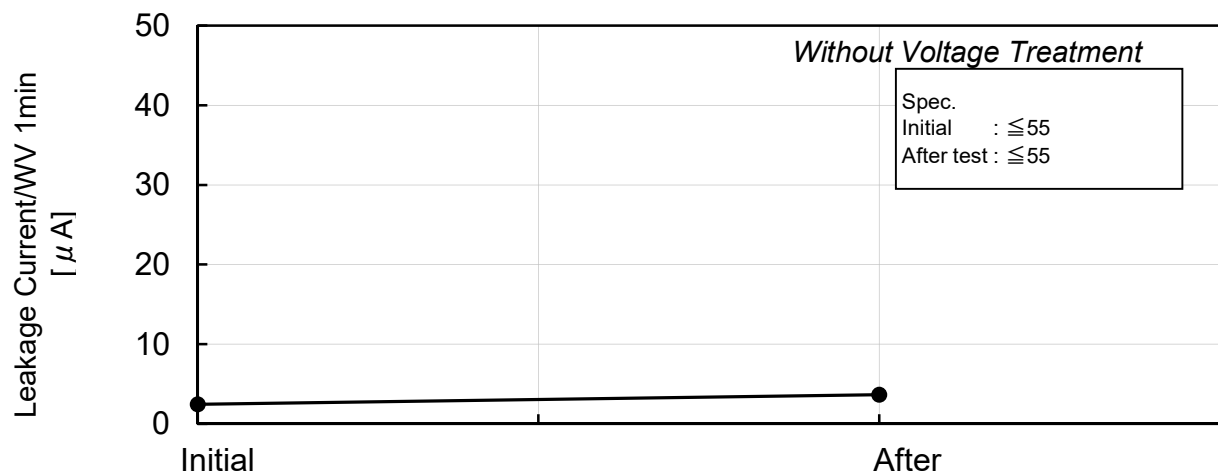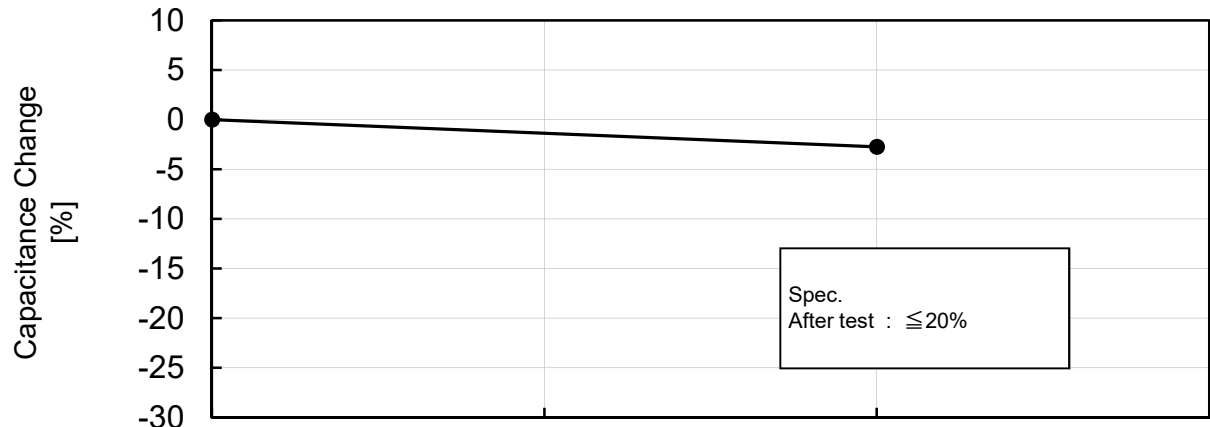

CHARACTERISTICS VS. TEMPERATURE



RUBYCON CORPORATION

SAMPLE :

25 TRV 220 M 8X10.5

n=3




Apparatus :
Agilent Technologies - E4980A

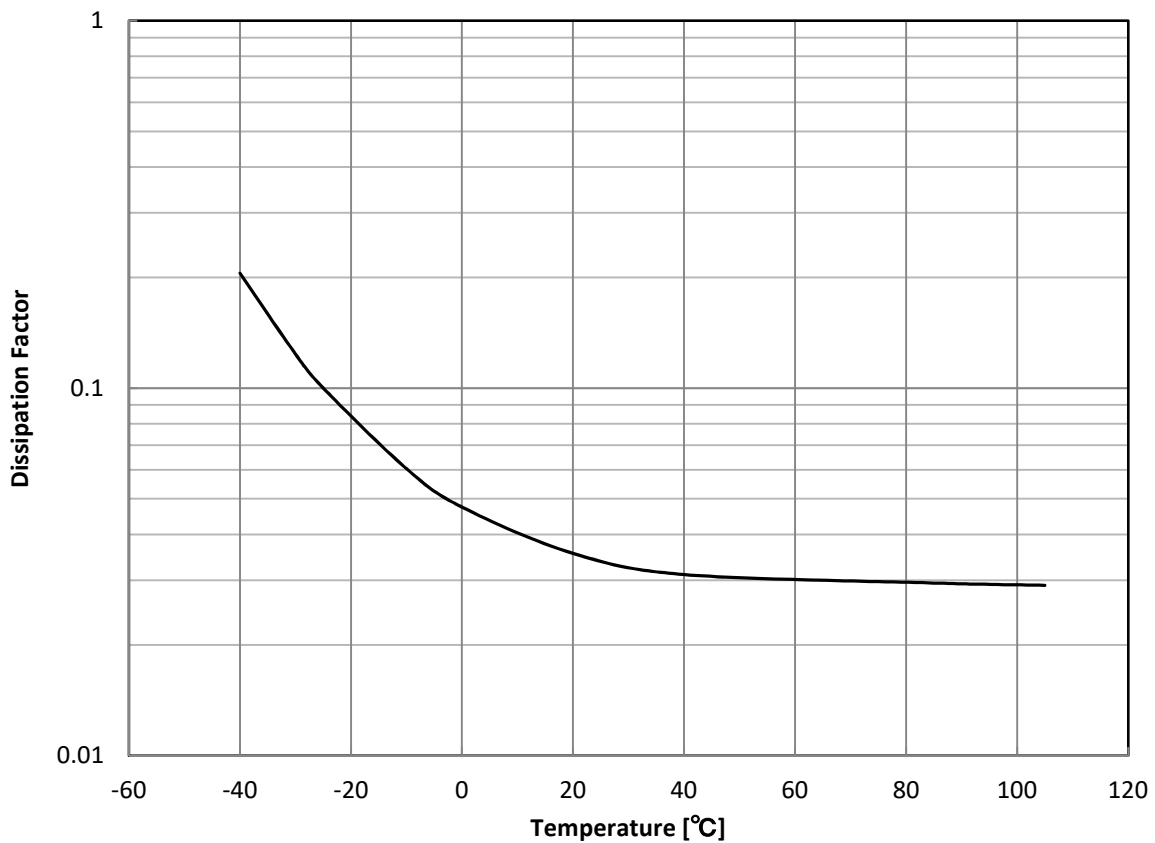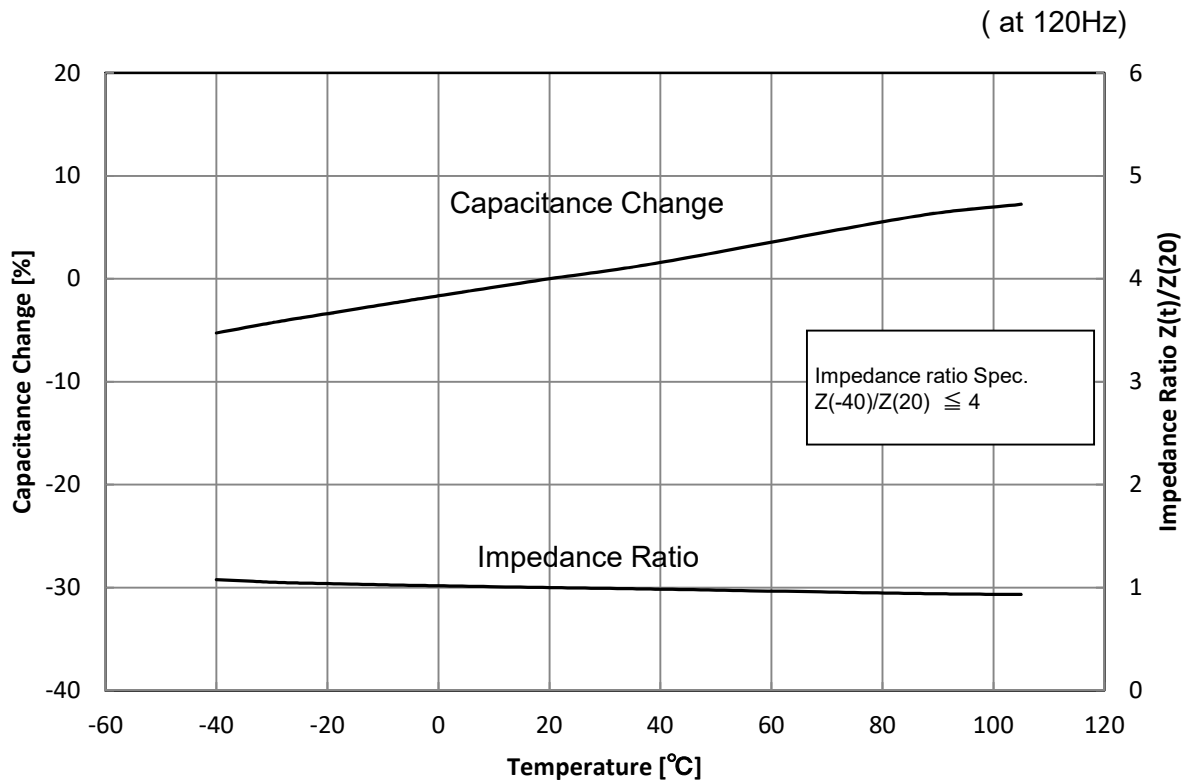

THE TEST RESULT

RUBYCON CORPORATION




PROJECT: Load Life Test	
SAMPLE: 50 TRV 10 M 6.3X6.1	SIZE: Dia. 6.3 × 6.1 L
TESTING METHODS: The capacitor under test shall be applied the rated voltage continuously at 105°C.	APPARATUS: YHP MODEL 4274A LCR METER (at 120Hz)
NOTE: n = 10	

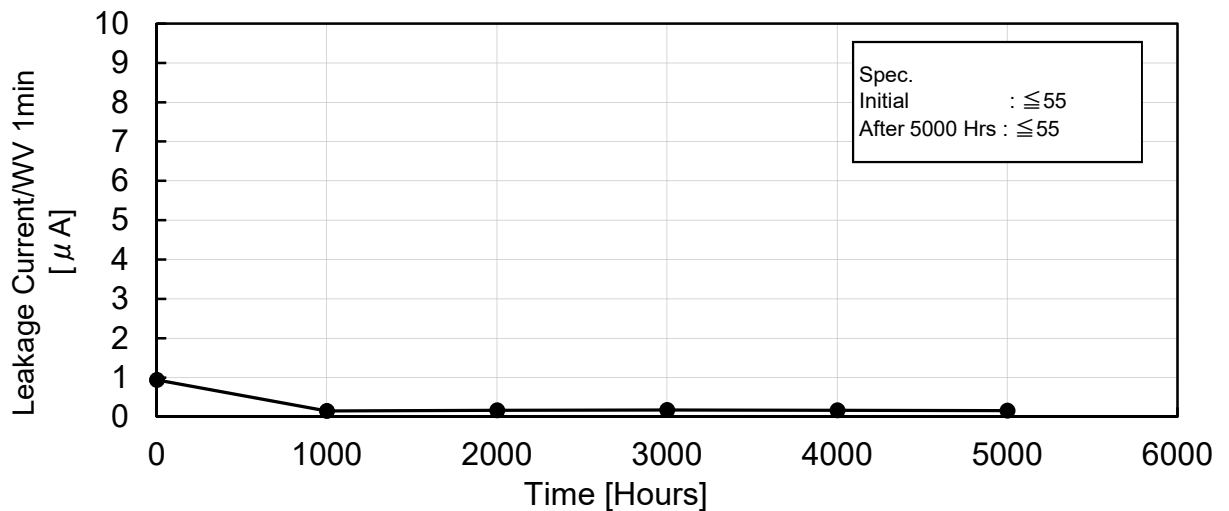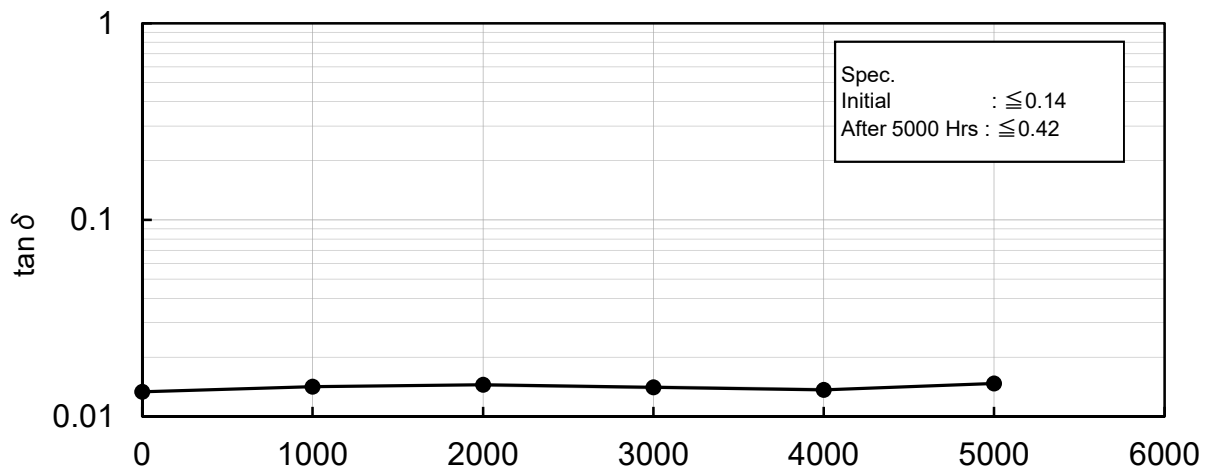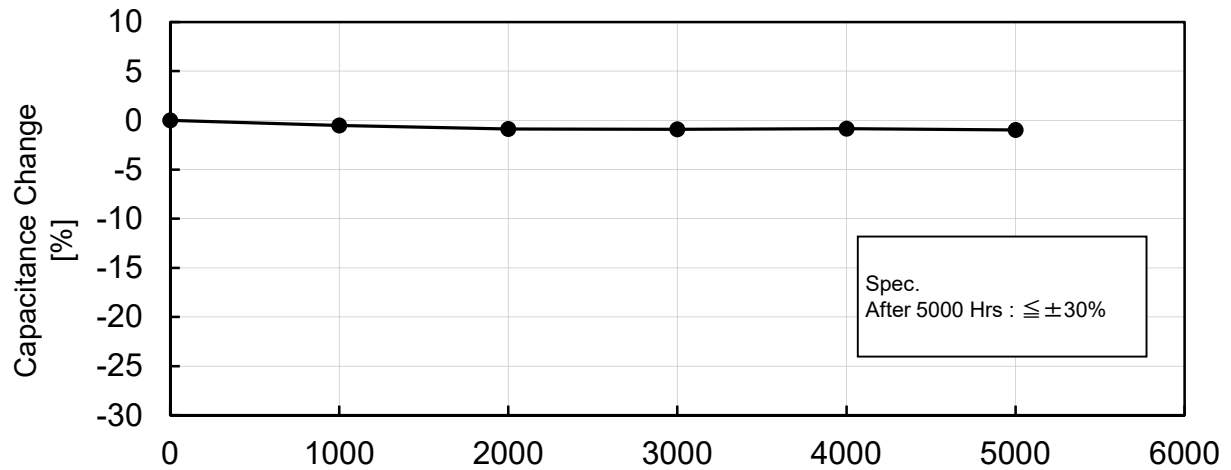

THE TEST RESULT

RUBYCON CORPORATION

PROJECT: Shelf Life Test	
SAMPLE: 50 TRV 10 M 6.3X6.1	SIZE: Dia. 6.3 × 6.1 L
TESTING METHODS: Capacitors shall be stored at 105 ±2°C without loading for 1000 Hrs.	APPARATUS: YHP MODEL 4274A LCR METER (at 120Hz)
NOTE: n = 10	

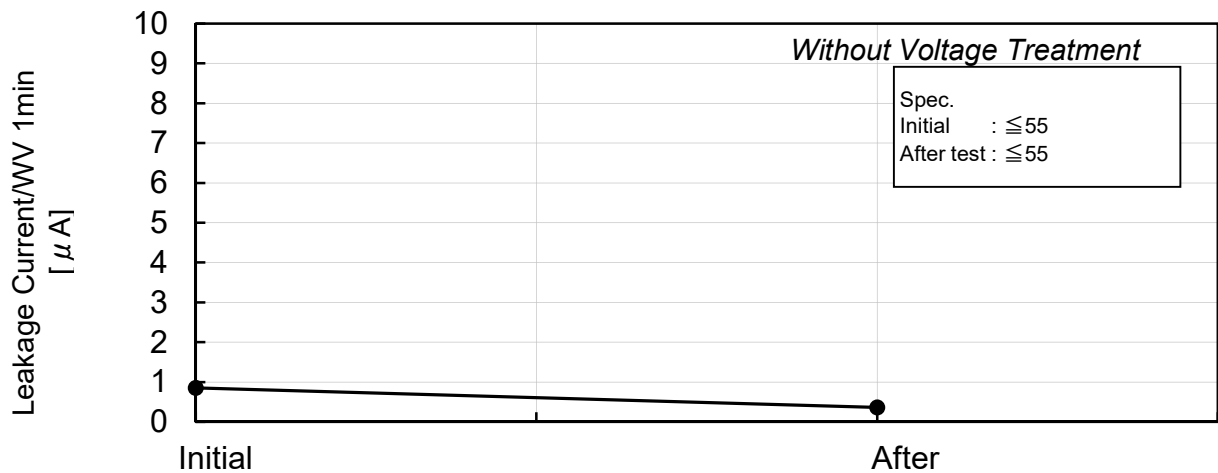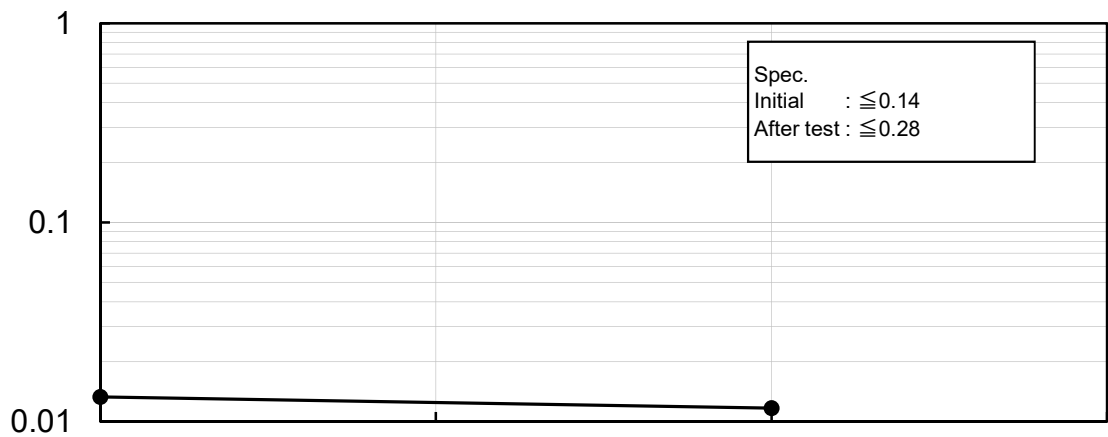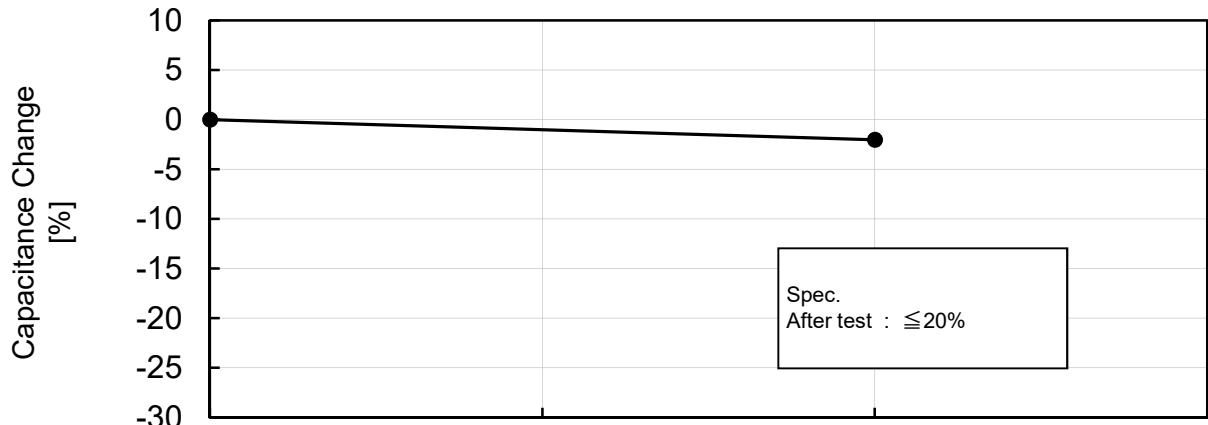

CHARACTERISTICS VS. TEMPERATURE

RUBYCON CORPORATION

SAMPLE :

50 TRV 10 M 6.3X6.1

n=3

Apparatus :
Agilent Technologies - E4980A

