


DMA SERIES

Load Life: 60°C 1000hours

◆ **FEATURES**


- Miniaturized,High capacitance
- RoHS compliance

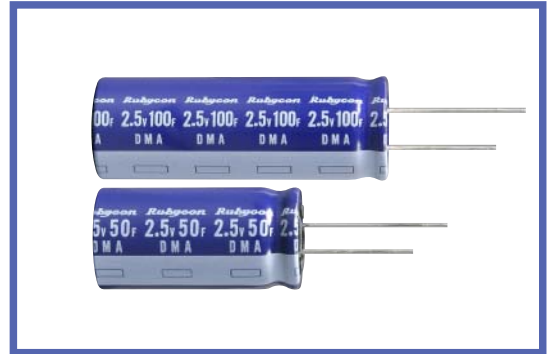


◆ **SPECIFICATIONS**

Items	Characteristics	
Category Temperature Range	-25~+60°C	
Rated Voltage Range	2.5V.DC	
Capacitance Tolerance	± 20%(20°C)	
Characteristics at High and low Temperatures	Capacitance Change	$ \Delta C/C(+20^\circ C) \leq 30\%$
	ESR	Max, 4 times of value at +20°C (at -25°C)
Endurance	After 1000 hours with rated voltage at 60°C, the capacitors shall meet the following requirements.	
	Capacitance Change	$ \Delta C/C(\text{initial}) \leq 30\%$
	ESR	Max, 3 times of the specification
Storage at High Temperature	After 1000 hours without load at 60°C, the capacitors shall meet the same requirements specified for endurance.	

◆ **PART NUMBER**



◆ **DIMENSIONS**

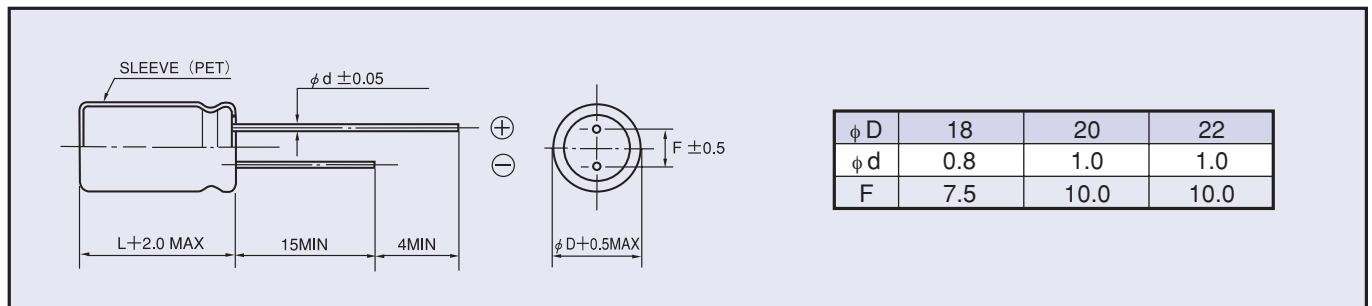

◆ **STANDARD SIZE**

Rated Voltage (V.DC)	Rated Capacitance (F)	ESR (Ω) at 1kHz	φ D×L (mm)	Part No.
2.5	50	0.1	18×35.5	2.5DMA50 □ **18×35.5
	60		18×40	2.5DMA60 □ **18×40
	100		20×55	2.5DMA100 □ **20×55
	190		22×65	2.5DMA190 □ **22×65

□:Tolerance (M: ± 20) **:Lead Forming