

DSB SERIES

Load Life: 60°C 2000hours

◆ FEATURES

- High Capacitance
- RoHS compliance




◆ SPECIFICATIONS

Items	Characteristics	
Category Temperature Range	-25~+60°C	
Rated Voltage Range	2.5V.DC	
Capacitance Tolerance	± 20%(20°C)	
Characteristics at High and low Temperatures	Capacitance Change	$ \Delta C/C(+20^\circ\text{C}) \leq 30\%$
	DC Internal Resistance	Max, 6 times of value at +20°C (at -25°C)
Endurance	After 2000 hours with rated voltage at 60°C, the capacitors shall meet the following requirements.	
	Capacitance Change	$ \Delta C/C(\text{initial}) \leq 30\%$
Storage at High Temperature	DC Internal Resistance	Max, 3 times of the specification
	After 2000 hours without load at 60°C, the capacitors shall meet the same requirements specified for endurance.	

◆ PART NUMBER



◆ DIMENSIONS

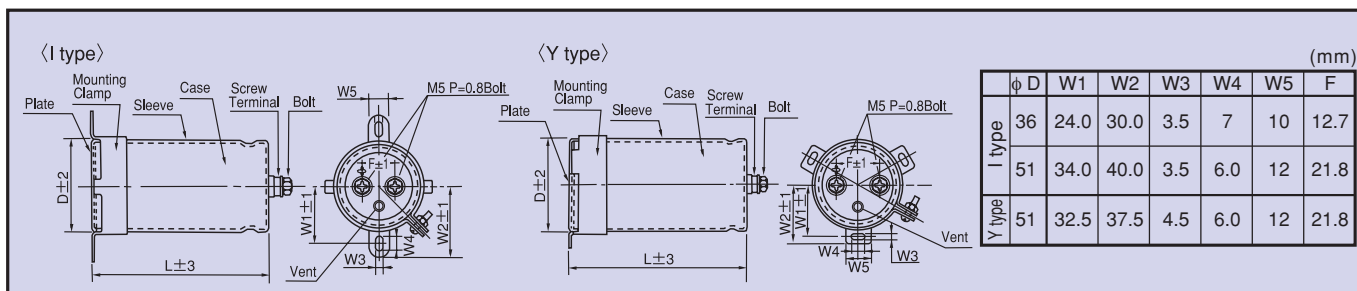

◆ STANDARD SIZE

Rated Voltage (V.DC)	Rated Capacitance (F)	DC Internal Resistance (mΩ)	φ D×L (mm)	Part No.
2.5	1000	10	36×135	2.5DSB1000 □ 36×135
	2300	5	51×135	2.5DSB2300 □ 51×135

□:Tolerance(M: ± 20)